

Taper Bushed Pulley



SPZ SPA SPB SPC



CATALOG

TAPER BUSHED PULLEY SPZ

TYPE 50-800(mm)

PAGE 04-14

TAPER BUSHED PULLEY SPA

TYPE 56-1000(mm)

PAGE 15-25

TAPER BUSHED PULLEY SPB

TYPE 80-1250(mm)

PAGE 26-41

TAPER BUSHED PULLEY SPC


TYPE 160-1250(mm)

PAGE 42-51

TAPER BUSHINGS DIMENSIONS

PAGE 52-56

V-Belt Pulley Nomenclature

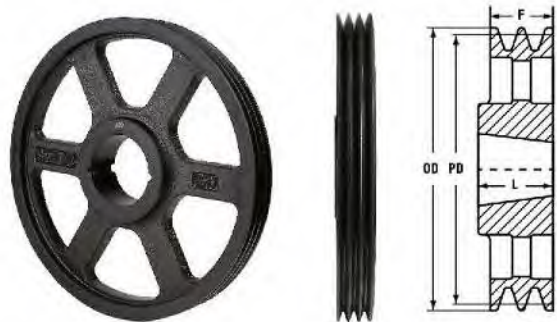

Solid Type 13 Construction

SPZ 355-3 2517

BELT SECTION
SPZ,SPA,SPB,SPC •
PITCH DIAMETER •
OF GROOVES •
TAPER BUSHED •



Solid Type 9 Construction

SPA 335-4 3020

BELT SECTION
SPZ,SPA,SPB,SPC •
PITCH DIAMETER •
OF GROOVES •
TAPER BUSHED •



Solid Type 12 Construction

SPB 425-3 3525

BELT SECTION
SPZ,SPA,SPB,SPC •
PITCH DIAMETER •
OF GROOVES •
TAPER BUSHED •


Solid Type 7 Construction

SPC 236-3 3020

BELT SECTION
SPZ,SPA,SPB,SPC •
PITCH DIAMETER •
OF GROOVES •
TAPER BUSHED •



Dimensions Of V-grooved Pueelys

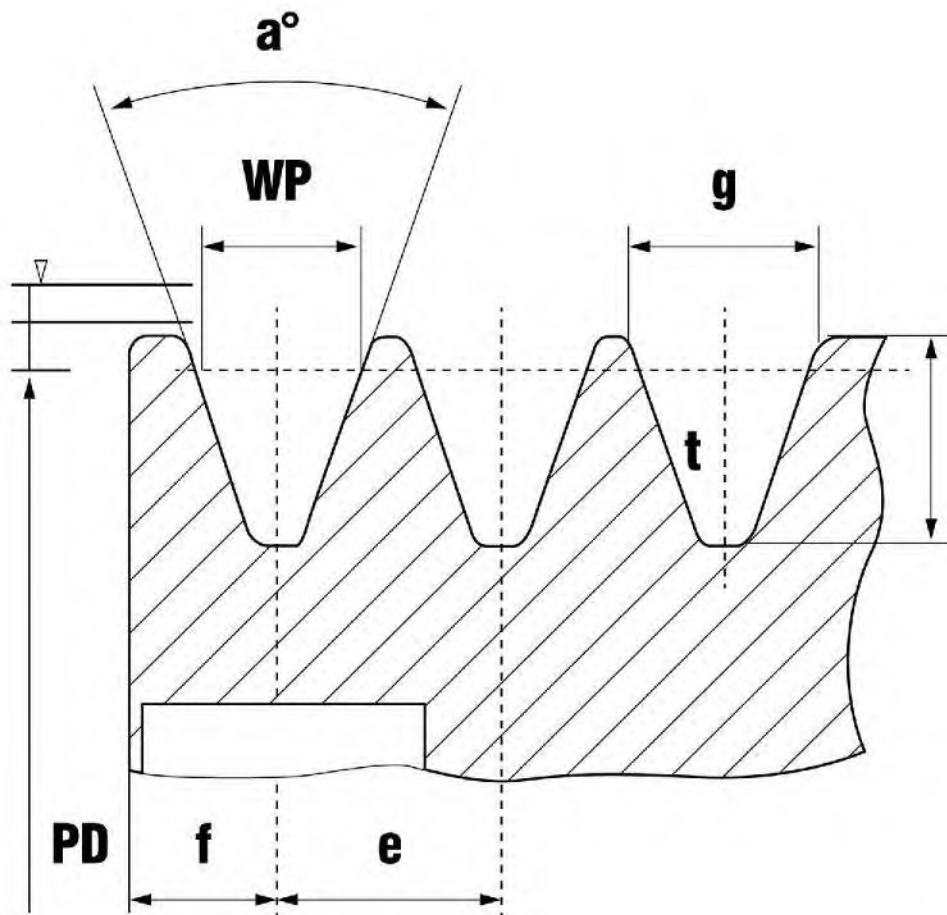

(mm)


GROOVE PROFILE	WP	b	t	e	f	PD	ANGLE a°	g
SPZ	8.5	2.0	$\begin{smallmatrix} +0.6 \\ 11.0 \end{smallmatrix} \begin{smallmatrix} 0 \\ 0 \end{smallmatrix}$	12 ± 0.3	8.0 ± 0.6	≤ 80	34 ± 1	9.72
						> 80	38 ± 1	9.88
SPA	11.0	2.8	$\begin{smallmatrix} +0.6 \\ 13.8 \end{smallmatrix} \begin{smallmatrix} 0 \\ 0 \end{smallmatrix}$	15 ± 0.3	10.0 ± 0.6	≤ 118	34 ± 1	12.68
						> 118	38 ± 1	12.89
SPB	14.0	3.5	$\begin{smallmatrix} +0.6 \\ 17.5 \end{smallmatrix} \begin{smallmatrix} 0 \\ 0 \end{smallmatrix}$	19 ± 0.4	12.5 ± 0.8	≤ 190	34 ± 1	16.14
						> 190	38 ± 1	16.41
SPC	19.0	4.8	$\begin{smallmatrix} +0.6 \\ 23.8 \end{smallmatrix} \begin{smallmatrix} 0 \\ 0 \end{smallmatrix}$	25.5 ± 0.5	17.0 ± 1	≤ 315	34 ± 0.5	21.94
						> 315	38 ± 0.5	22.31

Taper Bushed Pulley SPZ

TYPE 50-800(mm)



SPZ | Taper Bushed Pulley

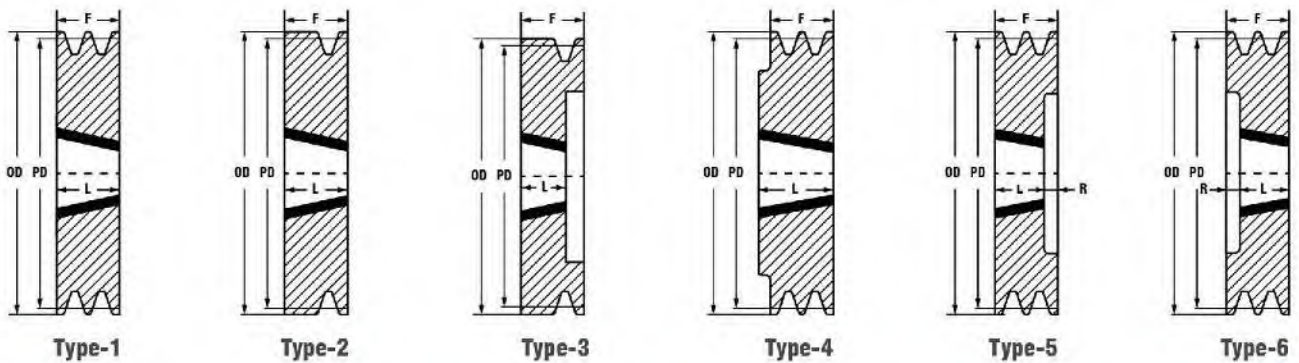


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPZ	50-1*	50	54	1008	3	38	24	14	—
SPZ	50-2*	50	54	1008	3	50	24	26	—
SPZ	56-1*	56	60	1008	3	37	24	13	—
SPZ	56-1D	56	60	1008	3	37	22	15	—
SPZ	56-2*	56	60	1008	3	49	24	25	—
SPZ	56-2Y*	56	60	1008	3	49	24	25	—
SPZ	56-3	56	60	1008	3	61	23	38	—
SPZ	60-1	60	64	1008	2	22	22	—	—
SPZ	60-1*	60	64	1008	2	22	22	—	—
SPZ	60-2	60	64	1108	3	49	22	27	—
SPZ	60-2*	60	64	1108	3	49	22	27	—
SPZ	60-3	60	64	1108	3	61	23	38	—
SPZ	62-1	62	66	1108	4	16	22	—	—
SPZ	62-2	62	66	1108	5	28	22	6	—
SPZ	62-3	62	66	1108	5	40	22	18	—
SPZ	63-1	63	67	1108	4	16	22	—	—
SPZ	63-1*	63	67	1108	4	16	22	—	—
SPZ	63-2	63	67	1108	5	28	22	6	—
SPZ	63-2Y	63	67	1108	1	28	28	—	—
SPZ	63-3	63	67	1108	5	40	22	18	—
SPZ	63-3Y	63	67	1108	6	40	22	18	—
SPZ	63-4	63	67	1108	5	52	22	30	—
SPZ	65-1	65	69	1108	4	16	22	—	—
SPZ	65-2	65	69	1108	5	28	22	—	—
SPZ	65-3	65	69	1108	5	40	22	—	—
SPZ	67-1	67	71	1108	4	16	22	—	—
SPZ	67-2	67	71	1108	5	28	22	6	—
SPZ	67-3	67	71	1108	5	40	22	18	—
SPZ	67-4	67	71	1108	5	52	22	30	—
SPZ	69-1	69	73	1108	4	16	22	—	—
SPZ	69-2	69	73	1108	5	28	22	—	—
SPZ	69-3	69	73	1108	5	40	22	—	—
SPZ	71-1	71	75	1108	4	16	22	—	—
SPZ	71-2	71	75	1108	5	28	22	6	—
SPZ	71-3	71	75	1108	5	40	22	18	—
SPZ	71-4	71	75	1108	5	52	22	30	—

NOTE: Material For Items Markend With “*” To Be Steel (45#)


SPZ | Taper Bushed Pulley



Type-4



Type-5



Type-6


SIZE		PD (mm)	OD (mm)	BUSH No.	TYPE	DIMENSIONS (mm)			
						F	L	R	P
SPZ	71-5	71	75	1108	5	64	22	42	-
SPZ	73-1	73	77	1108	4	16	22		
SPZ	73-2	73	77	1210	5	28	25		
SPZ	73-3	73	77	1210	5	40	25		
SPZ	75-1	75	79	1108	4	16	22	-	
SPZ	75-2	75	79	1210	5	28	25	3	-
SPZ	75-2*	75	79	1210	5	28	25	3	
SPZ	75-3	75	79	1210	5	40	25	15	-
SPZ	75-4	75	79	1210	5	52	25	27	-
SPZ	78-1	78	82	1210	4	16	25		
SPZ	78-2	78	82	1210	5	28	25	3	
SPZ	78-3	78	82	1210	5	40	25	15	
SPZ	80-1	80	84	1210	4	16	25	-	
SPZ	80-2	80	84	1210	5	28	25	3	-
SPZ	80-2*	80	84	1210	5	28	25	3	
SPZ	80-3	80	84	1210	5	40	25	15	-
SPZ	80-3Y	80	84	1210	6	40	25	15	-
SPZ	80-4	80	84	1210	5	52	25	27	-
SPZ	80-4*	80	84	1210	5	52	25	27	
SPZ	83-1	83	87	1210	4	16	25		
SPZ	83-2	83	87	1610	5	28	25	3	
SPZ	83-3	83	87	1610	5	40	25	15	
SPZ	85-1	85	89	1210	4	16	25	-	
SPZ	85-2	85	89	1610	5	28	25	3	-
SPZ	85-2*	85	89	1610	5	28	25	3	
SPZ	85-3	85	89	1610	5	40	25	15	-
SPZ	85-3*	85	89	1610	5	40	25	15	
SPZ	85-4	85	89	1610	5	52	25	27	-
SPZ	85-4*	85	89	1610	5	52	25	27	
SPZ	85-5	85	89	1610	5	64	25	39	-
SPZ	85-5*	85	89	1610	5	64	25	39	
SPZ	88-1	88	92	1210	4	16	25		
SPZ	88-2	88	92	1610	5	28	25	3	
SPZ	88-3	88	92	1610	5	40	25	15	

NOTE: Material For Items Markend With "*" To Be Steel (45#)


SPZ | Taper Bushed Pulley



Type-4



Type-5




Type-6


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPZ	90-1	90	94	1210	4	16	25	—	—
SPZ	90-2	90	94	1610	5	28	25	3	—
SPZ	90-3	90	94	1610	5	40	25	15	—
SPZ	90-3Y	90	94	1610	6	40	25	15	—
SPZ	90-3*	90	94	1610	5	40	25	15	—
SPZ	90-4	90	94	1610	5	52	25	27	—
SPZ	90-4*	90	94	1610	5	52	25	27	—
SPZ	90-5	90	94	1610	5	64	25	39	—
SPZ	90-5*	90	94	1610	5	64	25	39	—
SPZ	90-6	90	94	1610	5	76	25	51	—
SPZ	93-1	93	97	1210	4	16	25	—	—
SPZ	93-2	93	97	1610	5	28	25	3	—
SPZ	93-3	93	97	1610	5	40	25	15	—
SPZ	95-1	95	99	1210	4	16	25	—	—
SPZ	95-2	95	99	1610	5	28	25	3	—
SPZ	95-3	95	99	1610	5	40	25	15	—
SPZ	95-3Y	95	99	1610	6	40	25	15	—
SPZ	95-4	95	99	1610	5	52	25	27	—
SPZ	95-5	95	99	1610	5	64	25	39	—
SPZ	95-6	95	99	1610	5	76	25	51	—
SPZ	98-1	98	102	1210	4	16	25	—	—
SPZ	98-2	98	102	1610	5	28	25	3	—
SPZ	98-3	98	102	1610	5	40	25	15	—
SPZ	100-1	100	104	1210	4	16	25	—	—
SPZ	100-2	100	104	1610	5	28	25	3	—
SPZ	100-3	100	104	1610	5	40	25	15	—
SPZ	100-3Y	100	104	1610	6	40	25	15	—
SPZ	100-4	100	104	1610	5	52	25	27	—
SPZ	100-5	100	104	2012	5	64	32	32	—
SPZ	100-5*	100	104	2012	5	64	32	32	—
SPZ	100-6	100	104	2012	5	76	32	44	—
SPZ	100-6*	100	104	2012	5	76	32	44	—
SPZ	103-1	103	107	1610	4	16	25	—	—
SPZ	103-2	103	107	1610	5	28	25	3	—

NOTE: Material For Items Markend With "*" To Be Steel (45#)


SPZ | Taper Bushed Pulley




Type-1



Type-4







Type-5



Type-6





SIZE		PD (mm)	OD (mm)	BUSH No.	TYPE	DIMENSIONS (mm)			
						F	L	R	P
SPZ	103-3	103	107	1610	5	40	25	15	
SPZ	106-1	106	110	1610	4	16	25	—	
SPZ	106-2	106	110	1610	5	28	25	3	—
SPZ	106-2Y	106	110	1610	1	28	28	—	—
SPZ	106-3	106	110	1610	5	40	25	15	—
SPZ	106-3Y	106	110	1610	6	40	25	15	—
SPZ	106-4	106	110	1610	5	52	25	27	—
SPZ	106-4Y	106	110	2012	5	52	32	20	—
SPZ	106-5	106	110	2012	5	64	32	32	—
SPZ	106-5Y	106	110	2012	6	64	32	32	—
SPZ	106-6	106	110	2012	5	76	32	44	—
SPZ	109-1	109	113	1610	4	16	25		
SPZ	109-2	109	113	1610	5	28	25	3	
SPZ	109-3	109	113	2012	5	40	32	8	
SPZ	112-1	112	116	1610	4	16	25	—	
SPZ	112-2	112	116	1610	5	28	25	3	—
SPZ	112-2Y	112	116	1610	6	28	25	3	—
SPZ	112-3	112	116	2012	5	40	32	8	—
SPZ	112-3Y	112	116	2012	6	40	32	8	—
SPZ	112-4	112	116	2012	5	52	32	20	—
SPZ	112-5	112	116	2012	5	64	32	32	—
SPZ	112-5Y	112	116	2012	6	64	32	32	—
SPZ	112-6	112	116	2012	5	76	32	44	—
SPZ	115-1	115	119	1610	4	16	25		
SPZ	115-2	115	119	1610	5	28	25	3	
SPZ	115-3	115	119	2012	5	40	32	8	
SPZ	118-1	118	122	1610	4	16	25	—	
SPZ	118-2	118	122	1610	5	28	25	3	—
SPZ	118-2Y	118	122	1610	6	28	25	3	—
SPZ	118-3	118	122	2012	5	40	32	8	—
SPZ	118-3Y	118	122	2012	6	40	32	8	—
SPZ	118-4	118	122	2012	5	52	32	20	—
SPZ	118-4Y	118	122	2012	6	52	32	20	—

SPZ | Taper Bushed Pulley

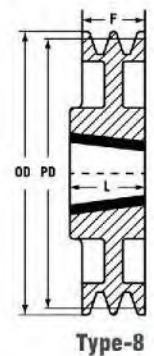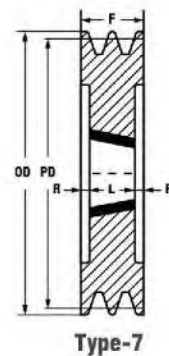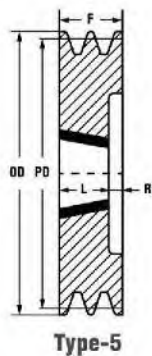

SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPZ	118-5	118	122	2012	5	64	32	32	—
SPZ	118-5Y	118	122	2012	6	64	32	32	—
SPZ	118-6	118	122	2517	5	76	45	31	—
SPZ	122-1	122	126	1610	4	16	25	—	—
SPZ	122-2	122	126	1610	5	28	25	3	—
SPZ	122-3	122	126	2012	6	40	32	8	—
SPZ	125-1	125	129	1610	4	16	25	—	—
SPZ	125-2	125	129	1610	5	28	25	3	—
SPZ	125-2Y	125	129	1610	1	28	28	—	—
SPZ	125-3	125	129	2012	6	40	32	8	—
SPZ	125-4	125	129	2012	6	52	32	20	—
SPZ	125-5	125	129	2012	5	64	32	32	—
SPZ	125-5Y	125	129	2012	6	64	32	32	—
SPZ	125-6	125	129	2517	5	76	45	31	—
SPZ	129-1	129	133	1610	4	16	25	—	—
SPZ	129-2	129	133	1610	5	28	25	3	—
SPZ	129-3	129	133	2012	6	40	32	8	—
SPZ	132-1	132	136	1610	4	16	25	—	—
SPZ	132-2	132	136	1610	5	28	25	3	—
SPZ	132-3	132	136	2012	6	40	32	8	—
SPZ	132-4	132	136	2012	6	52	32	20	—
SPZ	132-5	132	136	2517	5	64	45	19	—
SPZ	132-5Y	132	136	2517	6	64	45	19	—
SPZ	132-6	132	136	2517	5	76	45	31	—
SPZ	132-8	132	136	2517	7	100	45	27.5	—
SPZ	136-1	136	140	1610	4	16	25	—	—
SPZ	136-2	136	140	1610	5	28	25	3	—
SPZ	136-3	136	140	2012	6	40	32	8	—
SPZ	140-1	140	144	1610	8	16	25	—	9
SPZ	140-2	140	144	1610	5	28	25	3	—
SPZ	140-2Z	140	144	1610	6	28	25	3	—
SPZ	140-3	140	144	2012	6	40	32	8	—
SPZ	140-3Y	140	144	2012	5	40	32	8	—
SPZ	140-4	140	144	2012	6	52	32	20	—
SPZ	140-5	140	144	2517	6	64	45	19	—

SPZ | Taper Bushed Pulley

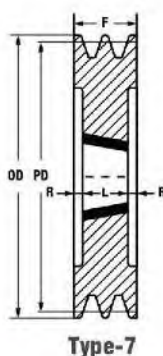


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPZ	140-6	140	144	2517	6	76	45	31	—
SPZ	140-8	140	144	2517	7	100	45	27.5	—
SPZ	145-1	145	149	1610	4	16	25	—	—
SPZ	145-2	145	149	2012	4	28	32	—	—
SPZ	145-3	145	149	2012	6	40	32	8	—
SPZ	150-1	150	154	1610	8	16	25	—	9
SPZ	150-2	150	154	2012	4	28	32	—	—
SPZ	150-3	150	154	2012	6	40	32	8	—
SPZ	150-4	150	154	2517	6	52	45	7	—
SPZ	150-5	150	154	2517	6	64	45	19	—
SPZ	150-6	150	154	2517	6	76	45	31	—
SPZ	150-8	150	154	2517	7	100	45	27.5	—
SPZ	155-1	155	159	1610	4	16	25	—	—
SPZ	155-2	155	159	2012	4	28	32	—	—
SPZ	155-3	155	159	2012	6	40	32	8	—
SPZ	160-1	160	164	1610	8	16	25	—	9
SPZ	160-2	160	164	2012	8	28	32	—	4
SPZ	160-2Y	160	164	1610	15	28	25	3	—
SPZ	160-3	160	164	2012	6	40	32	8	—
SPZ	160-4	160	164	2517	6	52	45	7	—
SPZ	160-5	160	164	2517	6	64	45	19	—
SPZ	160-6	160	164	2517	6	76	45	31	—
SPZ	160-8	160	164	2517	7	100	45	27.5	—
SPZ	165-1	165	169	1610	4	16	25	—	—
SPZ	165-2	165	169	2012	4	28	32	—	—
SPZ	165-3	165	169	2012	7	40	32	4	—
SPZ	170-1	170	174	1610	8	16	25	—	9
SPZ	170-2	170	174	2012	8	28	32	—	4
SPZ	170-3	170	174	2012	7	40	32	4	—
SPZ	170-3D	170	174	2012	6	40	32	8	—
SPZ	170-4	170	174	2517	6	52	45	7	—
SPZ	170-5	170	174	2517	6	64	45	19	—
SPZ	170-6	170	174	2517	6	76	45	31	—


SPZ | Taper Bushed Pulley




Type-4




Type-6




Type-7



Type-8




Type-9



Type-15


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPZ	175-1	175	179	1610	8	16	25		9
SPZ	175-2	175	179	2012	8	28	32		4
SPZ	175-3	175	179	2012	9	40	32	4	
SPZ	180-1	180	184	1610	8	16	25	—	9
SPZ	180-1D	180	184	1610	4	16	25	—	
SPZ	180-2	180	184	2012	8	28	32	—	4
SPZ	180-2D	180	184	2012	4	28	32	—	
SPZ	180-3	180	184	2012	15	40	32	8	—
SPZ	180-3D	180	184	2012	6	40	32	8	—
SPZ	180-3Z	180	184	2012	9	40	32	4	—
SPZ	180-4	180	184	2517	6	52	45	7	—
SPZ	180-4Z	180	184	2517	7	52	45	3.5	—
SPZ	180-5	180	184	2517	6	64	45	19	—
SPZ	180-5Z	180	184	2517	7	64	45	9.5	—
SPZ	180-6	180	184	2517	7	76	45	15.5	—
SPZ	180-6D	180	184	2517	6	76	45	31	—
SPZ	180-8	180	184	2517	7	100	45	27.5	
SPZ	185-1	185	189	1610	8	16	25		9
SPZ	185-2	185	189	2012	8	28	32		4
SPZ	185-3	185	189	2012	9	40	32	4	
SPZ	190-1	190	194	1610	8	16	25	—	9
SPZ	190-2	190	194	2012	8	28	32	—	4
SPZ	190-3	190	194	2012	9	40	32	4	—
SPZ	190-4	190	194	2517	9	52	45	3.5	—
SPZ	190-4Y	190	194	2012	6	52	32	20	—
SPZ	190-5	190	194	2517	9	64	45	9.5	—
SPZ	190-6	190	194	2517	9	76	45	15.5	—
SPZ	195-1	195	199	2012	8	16	32		16
SPZ	195-2	195	199	2012	8	28	32		4
SPZ	195-3	195	199	2012	9	40	32	4	
SPZ	200-1	200	204	2012	8	16	32	—	16
SPZ	200-1D	200	204	2012	4	16	32	—	
SPZ	200-1Y	200	204	1610	8	16	25	—	9
SPZ	200-2	200	204	2012	8	28	32	—	4

SPZ | Taper Bushed Pulley

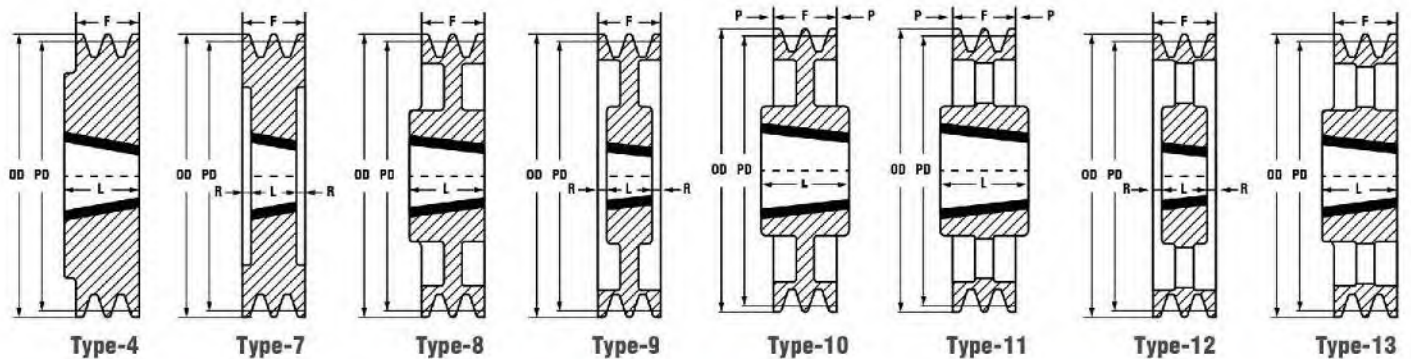


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPZ	200-2D	200	204	2012	4	28	32	—	—
SPZ	200-3	200	204	2012	9	40	32	4	—
SPZ	200-4	200	204	2517	9	52	45	3.5	—
SPZ	200-5	200	204	2517	9	64	45	9.5	—
SPZ	200-6	200	204	2517	9	76	45	15.5	—
SPZ	200-8	200	204	3020	7	100	51	24.5	—
SPZ	212-1	212	216	2012	8	16	32	—	16
SPZ	212-2	212	216	2012	8	28	32	—	4
SPZ	212-3	212	216	2012	9	40	32	4	—
SPZ	212-4	212	216	2517	9	52	45	3.5	—
SPZ	212-5	212	216	2517	9	64	45	9.5	—
SPZ	212-6	212	216	2517	9	76	45	15.5	—
SPZ	224-1	224	228	2012	13	16	32	—	16
SPZ	224-1Z	224	228	2012	10	16	32	—	8
SPZ	224-2	224	228	2012	13	28	32	—	4
SPZ	224-2Z	224	228	2012	10	28	32	—	2
SPZ	224-3	224	228	2012	9	40	32	4	—
SPZ	224-4	224	228	2517	9	52	45	3.5	—
SPZ	224-5	224	228	2517	9	64	45	9.5	—
SPZ	224-6	224	228	2517	9	76	45	15.5	—
SPZ	224-8	224	228	3020	7	100	51	24.5	—
SPZ	236-1	236	240	2012	13	16	32	—	16
SPZ	236-2	236	240	2012	13	28	32	—	4
SPZ	236-3	236	240	2012	9	40	32	4	—
SPZ	236-4	236	240	2517	9	52	45	3.5	—
SPZ	250-1	250	254	2012	11	16	32	—	8
SPZ	250-2	250	254	2012	11	28	32	—	2
SPZ	250-3	250	254	2012	12	40	32	4	—
SPZ	250-4	250	254	2517	9	52	45	3.5	—
SPZ	250-5	250	254	2517	9	64	45	9.5	—
SPZ	250-6	250	254	2517	9	76	45	15.5	—
SPZ	265-1	265	269	2012	11	16	32	—	8
SPZ	265-2	265	269	2517	8	28	45	—	17
SPZ	265-3	265	269	2517	8	40	45	—	5


SPZ | Taper Bushed Pulley




Type-8



Type-9






Type-11



Type-12

SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPZ	265-4	265	269	2517	12	52	45	3.5	—
SPZ	265-5	265	269	2517	12	64	45	9.5	—
SPZ	280-1	280	284	2012	11	16	32	—	8
SPZ	280-2	280	284	2012	11	28	32	—	2
SPZ	280-3	280	284	2517	11	40	45	—	2.5
SPZ	280-3Y	280	284	2012	12	40	32	4	—
SPZ	280-4	280	284	2517	12	52	45	3.5	—
SPZ	280-5	280	284	2517	12	64	45	9.5	—
SPZ	280-6	280	284	2517	12	76	45	15.5	—
SPZ	300-1	300	304	2012	8	16	32	—	16
SPZ	300-2	300	304	2012	8	28	32	—	4
SPZ	300-3	300	304	2012	9	40	32	4	—
SPZ	300-4	300	304	2517	9	52	45	3.5	—
SPZ	300-5	300	304	2517	9	64	45	9.5	—
SPZ	315-1	315	319	2012	11	16	32	—	8
SPZ	315-2	315	319	2012	11	28	32	—	2
SPZ	315-3	315	319	2517	11	40	45	—	2.5
SPZ	315-4	315	319	2517	12	52	45	3.5	—
SPZ	315-5	315	319	2517	12	64	45	9.5	—
SPZ	315-6	315	319	2517	12	76	45	15.5	—
SPZ	355-1	355	359	2012	11	16	32	—	8
SPZ	355-2	355	359	2012	11	28	32	—	2
SPZ	355-3	355	359	2517	11	40	45	—	2.5
SPZ	355-4	355	359	2517	12	52	45	3.5	—
SPZ	355-5	355	359	2517	12	64	45	9.5	—
SPZ	355-6	355	359	2517	12	76	45	15.5	—
SPZ	400-1	400	404	2012	11	16	32	—	8
SPZ	400-2	400	404	2517	11	28	45	—	8.5
SPZ	400-3	400	404	2517	11	40	45	—	2.5
SPZ	400-4	400	404	2517	12	52	45	3.5	—
SPZ	400-5	400	404	3020	12	64	51	6.5	—

SPZ | Taper Bushed Pulley




SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPZ	400-6	400	404	3030	11	76	76	-	0
SPZ	400-6R	400	404	3020	12	76	51	12.5	-
SPZ	450-2	450	454	2517	11	28	45	-	8.5
SPZ	450-3	450	454	2517	11	40	45	-	2.5
SPZ	450-4	450	454	3020	12	52	51	0.5	-
SPZ	450-5	450	454	3020	12	64	51	6.5	-
SPZ	450-6	450	454	3030	11	76	76	-	0
SPZ	450-6R	450	454	3020	12	76	51	12.5	-
SPZ	500-2	500	504	2517	11	28	45	-	8.5
SPZ	500-3	500	504	2517	11	40	45	-	2.5
SPZ	500-4	500	504	3020	12	52	51	0.5	-
SPZ	500-5	500	504	3030	11	64	76	-	6
SPZ	500-5R	500	504	3020	12	64	51	6.5	-
SPZ	500-6	500	504	3030	11	76	76	-	0
SPZ	500-6R	500	504	3020	12	76	51	12.5	-
SPZ	500-8	500	504	3535	12	100	89	5.5	-
SPZ	560-3	560	564	2517	13	40	45	-	5
SPZ	560-4	560	564	3020	12	52	51	0.5	-
SPZ	560-5	560	564	3030	11	64	76	-	6
SPZ	630-2	630	634	3020	11	28	51	-	11.5
SPZ	630-3	630	634	3020	11	40	51	-	5.5
SPZ	630-4	630	634	3030	11	52	76	-	12
SPZ	630-4R	630	634	3020	12	52	51	0.5	-
SPZ	630-5	630	634	3030	11	64	76	-	6
SPZ	630-6	630	634	3535	11	76	89	-	6.5
SPZ	800-3	800	804	3020	11	40	51	-	5.5
SPZ	800-4	800	804	3030	11	52	76	-	12

Taper Bushed Pulley SPA


TYPE 56-1000(mm)




SPA | Taper Bushed Pulley



Type-3




Type-4




Type-5

SIZE		PD (mm)	OD (mm)	BUSH No.	TYPE	DIMENSIONS (mm)			
						F	L	R	P
SPA	56-2*	56	61.6	1008	3	57	25	32	
SPA	60-1	60	65.6	1008	4	20	42	—	22
SPA	60-1ST	60	65.6	1008	4	20	42	—	22
SPA	63-1	63	68.6	1008	4	20	22	—	
SPA	63-1*	63	68.6	1008	4	20	22		
SPA	63-1D	63	68.6	1108	3	40	22	18	—
SPA	63-2*	63	68.6	1008	5	35	22	13	—
SPA	63-2D	63	68.6	1108	3	55	22	33	—
SPA	67-1	67	72.6	1108	4	20	22	—	
SPA	67-1*	67	72.6	1108	4	20	22		
SPA	67-1G	67	72.6	1008	4	20	22	—	
SPA	67-2	67	72.6	1108	5	35	22	13	—
SPA	67-2*	67	72.6	1108	5	35	22	13	
SPA	67-2G	67	72.6	1008	5	35	22	13	
SPA	71-1	71	76.6	1108	4	20	22	—	
SPA	71-2	71	76.6	1108	5	35	22	13	—
SPA	71-3	71	76.6	1108	5	50	22	28	—
SPA	75-1	75	80.6	1108	4	20	22	—	
SPA	75-2	75	80.6	1108	5	35	22	13	—
SPA	75-2*	75	80.6	1108	5	35	22	13	
SPA	75-3	75	80.6	1108	5	50	22	28	—
SPA	80-1	80	85.6	1210	4	20	25	—	
SPA	80-2	80	85.6	1210	5	35	25	10	—
SPA	80-2*	80	85.6	1210	5	35	25	10	
SPA	80-3	80	85.6	1210	5	50	25	25	—
SPA	80-3*	80	85.6	1210	5	50	25	25	
SPA	80-4	80	85.6	1215	5	65	38	27	—
SPA	80-4R	80	85.6	1210	5	65	25	40	—
SPA	85-1	85	90.6	1210	4	20	25	—	
SPA	85-1*	85	90.6	1210	4	20	25		
SPA	85-2	85	90.6	1210	5	35	25	10	—
SPA	85-2*	85	90.6	1210	5	35	25	10	
SPA	85-3	85	90.6	1210	5	50	25	25	—
SPA	85-3*	85	90.6	1210	5	50	25	25	
SPA	85-4	85	90.6	1215	5	65	38	27	—
SPA	85-4R	85	90.6	1210	5	65	25	40	—
SPA	88-1	88	93.6	1210	4	20	25		
SPA	88-2	88	93.6	1210	5	35	25	10	
SPA	88-3	88	93.6	1210	5	50	25	25	
SPA	90-1	90	95.6	1210	4	20	25	—	5
SPA	90-2	90	95.6	1610	5	35	25	10	—


SPA | Taper Bushed Pulley




Type-4



Type-5



Type-6




Type-7


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPA	90-2*	90	95.6	1610	5	35	25	10	
SPA	90-3	90	95.6	1610	5	50	25	25	—
SPA	90-3*	90	95.6	1610	5	50	25	25	
SPA	90-4D	90	95.6	1615	7	65	38	13.5	—
SPA	90-4	90	95.6	1615	5	65	38	27	—
SPA	90-4R	90	95.6	1610	5	65	25	40	—
SPA	90-5	90	95.6	1615	5	80	38	42	—
SPA	95-1	95	100.6	1210	4	20	25	—	
SPA	95-2	95	100.6	1610	5	35	25	10	—
SPA	95-3	95	100.6	1610	5	50	25	25	—
SPA	95-3*	95	100.6	1610	5	50	25	25	
SPA	95-4	95	100.6	1615	5	65	38	27	—
SPA	95-4D	95	100.6	1615	7	65	38	13.5	—
SPA	95-4Y	95	100.6	1610	5	65	25	40	—
SPA	95-5	95	100.6	1615	5	80	38	42	—
SPA	100-1	100	105.6	1610	4	20	25	—	
SPA	100-2	100	105.6	1610	5	35	25	10	—
SPA	100-2Y	100	105.6	1610	6	35	25	10	—
SPA	100-3	100	105.6	1610	6	50	25	25	—
SPA	100-4	100	105.6	1615	6	65	38	27	—
SPA	100-4Y	100	105.6	1610	6	65	25	40	—
SPA	100-5	100	105.6	1615	6	80	38	42	—
SPA	100-5T	100	105.6	1610	5	80	25	55	—
SPA	100-5Y	100	105.6	1610	6	80	25	55	—
SPA	100-5Z	100	105.6	1615	5	80	38	42	—
SPA	100-6	100	105.6	1610	7	95	25	35	—
SPA	100-6D	100	105.6	1615	7	95	38	28.5	—
SPA	103-1	103	108.6	1610	4	20	25	—	
SPA	103-2	103	108.6	1610	6	35	25	10	
SPA	103-3	103	108.6	1610	6	50	25	25	
SPA	105-1	105	110.6	1610	4	20	25	—	
SPA	105-2	105	110.6	1610	5	35	25	10	
SPA	105-3	105	110.6	1610	6	50	25	25	
SPA	106-1	106	111.6	1610	4	20	25	—	
SPA	106-2	106	111.6	1610	5	35	25	10	—
SPA	106-2Y	106	111.6	1610	6	35	25	10	—
SPA	106-3	106	111.6	1610	6	50	25	25	—
SPA	106-4	106	111.6	2012	5	65	32	33	—

NOTE: Material For Items Markend With “*” To Be Steel (45#)


SPA | Taper Bushed Pulley




Type-4



Type-5



Type-6




Type-7

SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPA	106-4*	106	111.6	2012	5	65	32	33	—
SPA	106-4Y	106	111.6	1615	6	65	38	27	—
SPA	106-5	106	111.6	2012	5	80	32	48	—
SPA	106-5*	106	111.6	2012	5	80	32	48	—
SPA	106-6	106	111.6	2012	5	95	32	63	—
SPA	112-1	112	117.6	1610	4	20	25	—	—
SPA	112-2	112	117.6	1610	5	35	25	10	—
SPA	112-3	112	117.6	2012	5	50	32	18	—
SPA	112-4	112	117.6	2012	5	65	32	33	—
SPA	112-5	112	117.6	2012	5	80	32	48	—
SPA	112-6	112	117.6	2012	5	95	32	63	—
SPA	115-1	115	120.6	1610	4	20	25	—	—
SPA	115-2	115	120.6	1610	5	35	25	10	—
SPA	115-3	115	120.6	2012	5	50	25	25	—
SPA	118-1	118	123.6	1610	4	20	25	—	—
SPA	118-2	118	123.6	1610	5	35	25	10	—
SPA	118-3	118	123.6	2012	6	50	32	18	—
SPA	118-4	118	123.6	2012	6	65	32	33	—
SPA	118-5	118	123.6	2012	6	80	32	48	—
SPA	118-6	118	123.6	2012	5	95	32	63	—
SPA	125-1	125	130.6	1610	4	20	25	—	—
SPA	125-2	125	130.6	1610	5	35	25	10	—
SPA	125-2Z	125	130.6	1610	6	35	25	10	—
SPA	125-3	125	130.6	2012	6	50	32	18	—
SPA	125-4	125	130.6	2012	6	65	32	33	—
SPA	125-5	125	130.6	2012	7	80	32	24	—
SPA	125-5Z	125	130.6	2012	6	80	32	48	—
SPA	125-6	125	130.6	2012	7	95	32	31.5	—
SPA	132-1	132	137.6	1610	4	20	25	—	—
SPA	132-2	132	137.6	2012	5	35	32	3	—
SPA	132-2Z	132	137.6	2012	6	35	32	3	—
SPA	132-3	132	137.6	2012	6	50	32	18	—
SPA	132-4	132	137.6	2517	6	65	45	20	—
SPA	132-5	132	137.6	2517	7	80	45	17.5	—
SPA	132-5Z	132	137.6	2517	6	80	45	35	—
SPA	132-6	132	137.6	2517	7	95	45	25	—
SPA	140-1	140	145.6	1610	4	20	25	—	—
SPA	140-2	140	145.6	2012	5	35	32	3	—
SPA	140-2Z	140	145.6	2012	6	35	32	3	—
SPA	140-3	140	145.6	2517	5	50	45	5	—


NOTE: Material For Items Markend With “*” To Be Steel (45#)

SPA | Taper Bushed Pulley

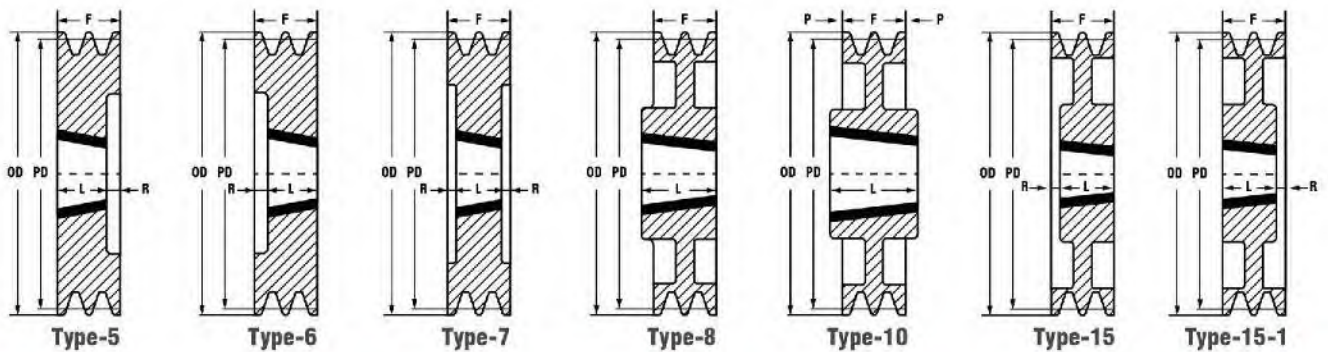


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPA	140-3Z	140	145.6	2517	6	50	45	5	—
SPA	140-4	140	145.6	2517	6	65	45	20	—
SPA	140-4Y	140	145.6	2012	6	65	32	33	—
SPA	140-5	140	145.6	2517	7	80	45	17.5	—
SPA	140-5Z	140	145.6	2517	6	80	45	35	—
SPA	140-6	140	145.6	2517	7	95	45	25	—
SPA	145-1G	145	150.6	1610	8	20	25	—	5
SPA	145-2G	145	150.6	2012	6	35	25	10	—
SPA	145-3G	145	150.6	2517	6	50	45	5	—
SPA	145-4	145	150.6	2517	6	65	45	20	—
SPA	150-1	150	155.6	1610	8	20	25	—	5
SPA	150-2	150	155.6	2012	5	35	32	3	—
SPA	150-2Z	150	155.6	2012	6	35	32	3	—
SPA	150-3	150	155.6	2517	5	50	45	5	—
SPA	150-3Z	150	155.6	2517	6	50	45	5	—
SPA	150-4	150	155.6	2517	6	65	45	20	—
SPA	150-5	150	155.6	2517	7	80	45	17.5	—
SPA	150-5Z	150	155.6	2517	6	80	45	35	—
SPA	150-6	150	155.6	2517	7	95	45	25	—
SPA	155-1G	155	160.6	1610	8	20	25	—	5
SPA	155-2G	155	160.6	2012	6	35	25	10	—
SPA	155-3G	155	160.6	2517	6	50	45	5	—
SPA	155-4	155	160.6	2517	6	65	45	20	—
SPA	155-5	155	160.6	2517	7	80	45	17.5	—
SPA	160-1	160	165.6	1610	8	20	25	—	5
SPA	160-1G	160	165.6	1610	10	20	25	—	2.5
SPA	160-2	160	165.6	2012	5	35	32	3	—
SPA	160-2Z	160	165.6	2012	6	35	32	3	—
SPA	160-3	160	165.6	2517	5	50	45	5	—
SPA	160-3Z	160	165.6	2517	6	50	45	5	—
SPA	160-4	160	165.6	2517	6	65	45	20	—
SPA	165-1	165	170.6	1610	8	20	25	—	5
SPA	165-2	165	170.6	2012	5	35	32	3	—
SPA	165-3	165	170.6	2517	5	50	45	5	—
SPA	170-1	170	175.6	1610	8	20	25	—	5
SPA	170-1D	170	175.6	1610	10	20	25	—	2.5
SPA	170-2	170	175.6	2012	15-1	35	32	3	—
SPA	170-2Z	170	175.6	2012	15	35	32	3	—
SPA	170-3	170	175.6	2517	5	50	45	5	—
SPA	170-3Z	170	175.6	2517	6	50	45	5	—
SPA	170-4	170	175.6	2517	6	65	45	20	—
SPA	170-5	170	175.6	2517	7	80	45	17.5	—
SPA	170-5Y	170	175.6	3020	7	80	51	14.5	—

SPA | Taper Bushed Pulley

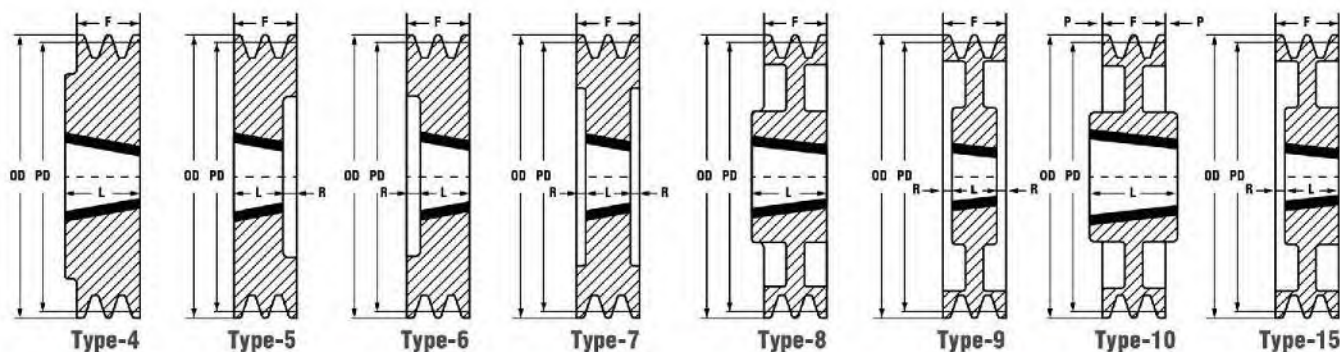


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPA	170-6	170	175.6	2517	7	95	45	25	—
SPA	175-1G	175	180.6	1610	8	20	25	—	5
SPA	175-2G	175	180.6	2012	15	35	32	3	—
SPA	175-3G	175	180.6	2517	6	50	45	5	—
SPA	175-4	175	180.6	2517	6	65	45	20	—
SPA	180-1	180	185.6	1610	8	20	25	—	5
SPA	180-1D	180	185.6	1610	10	20	25	—	2.5
SPA	180-1Y	180	185.6	1610	4	20	25	—	—
SPA	180-2	180	185.6	2012	9	35	32	1.5	—
SPA	180-3	180	185.6	2517	5	50	45	5	—
SPA	180-3Z	180	185.6	2517	6	50	45	5	—
SPA	180-3Y	180	185.6	2012	9	50	32	9	—
SPA	180-4	180	185.6	2517	6	65	45	20	—
SPA	180-5	180	185.6	3020	7	80	51	14.5	—
SPA	180-5Z	180	185.6	3020	6	80	51	29	—
SPA	180-6	180	185.6	3020	7	95	51	22	—
SPA	185-1	185	190.6	1610	8	20	25	—	5
SPA	185-2	185	190.6	2012	9	35	32	1.5	—
SPA	185-3	185	190.6	2517	5	50	45	5	—
SPA	190-1	190	195.6	1610	8	20	25	—	5
SPA	190-1D	190	195.6	1610	4	20	25	—	—
SPA	190-1Z	190	195.6	1610	10	20	25	—	2.5
SPA	190-2	190	195.6	2012	15	35	32	3	—
SPA	190-2D	190	195.6	2012	9	35	32	1.5	—
SPA	190-2Y	190	195.6	2517	8	35	45	—	10
SPA	190-3	190	195.6	2517	5	50	45	5	—
SPA	190-3Z	190	195.6	2517	6	50	45	5	—
SPA	190-4	190	195.6	2517	6	65	45	20	—
SPA	190-5	190	195.6	3020	6	80	51	29	—
SPA	190-6	190	195.6	3020	7	95	51	22	—
SPA	195-1	195	200.6	2012	8	20	32	—	12
SPA	195-2	195	200.6	2517	10	35	45	—	5
SPA	195-3	195	200.6	2517	9	50	45	2.5	—
SPA	200-1	200	205.6	2012	8	20	32	—	12
SPA	200-1Z	200	205.6	2012	10	20	32	—	6
SPA	200-2	200	205.6	2517	10	35	45	—	5
SPA	200-2Y	200	205.6	2012	15	35	32	3	—
SPA	200-3	200	205.6	2517	9	50	45	2.5	—
SPA	200-4	200	205.6	3020	6	65	51	14	—
SPA	200-5	200	205.6	3020	7	80	51	14.5	—
SPA	200-6	200	205.6	3020	7	95	51	22	—
SPA	205-1	205	210.6	2012	8	20	32	—	12

SPA | Taper Bushed Pulley

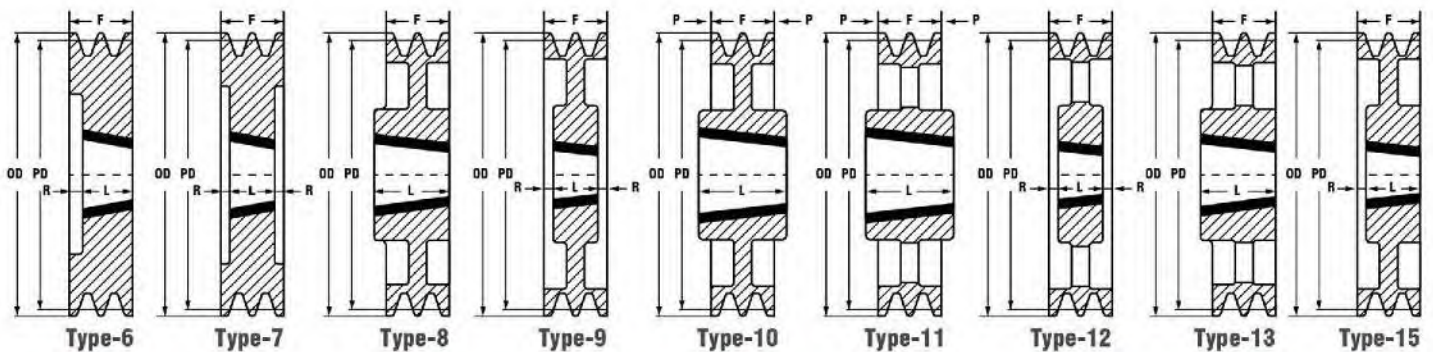


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPA	205-2	205	210.6	2517	10	35	45		5
SPA	205-3	205	210.6	2517	9	50	45	2.5	
SPA	212-1	212	217.6	2012	8	20	32	—	12
SPA	212-2	212	217.6	2517	8	35	45	—	10
SPA	212-3	212	217.6	2517	9	50	45	2.5	—
SPA	212-4	212	217.6	3020	6	65	51	14	—
SPA	212-5	212	217.6	3020	6	80	51	29	—
SPA	212-6	212	217.6	3020	7	95	51	22	—
SPA	215-1	215	220.6	2012	8	20	32		12
SPA	215-2	215	220.6	2517	8	35	45		10
SPA	215-3	215	220.6	2517	9	50	45	2.5	
SPA	224-1	224	229.6	2012	13	20	32	—	12
SPA	224-1Z	224	229.6	2012	11	20	32	—	6
SPA	224-2Y	224	229.6	2012	15	35	32	3	—
SPA	224-2Z	224	229.6	2517	10	35	45	—	5
SPA	224-2	224	229.6	2517	13	35	45	—	10
SPA	224-3	224	229.6	2517	12	50	45	2.5	—
SPA	224-4	224	229.6	3020	6	65	51	14	—
SPA	224-5	224	229.6	3020	6	80	51	29	—
SPA	224-6	224	229.6	3020	7	95	51	22	—
SPA	230-1	230	235.6	2012	8	20	32		12
SPA	230-2	230	235.6	2517	8	35	45		10
SPA	230-3	230	235.6	2517	9	50	45	2.5	
SPA	236-1	236	241.6	2012	13	20	32	—	12
SPA	236-2	236	241.6	2517	13	35	45	—	10
SPA	236-3	236	241.6	2517	12	50	45	2.5	—
SPA	236-4	236	241.6	3020	9	65	51	7	—
SPA	236-5	236	241.6	3020	9	80	51	14.5	—
SPA	236-6	236	241.6	3020	9	95	51	22	—
SPA	243-1	243	248.6	2012	10	20	32		6
SPA	243-2	243	248.6	2517	10	35	45		5
SPA	243-3	243	248.6	2517	9	50	45	2.5	
SPA	250-1	250	255.6	2012	11	20	32	—	6
SPA	250-2	250	255.6	2517	11	35	45	—	5
SPA	250-3	250	255.6	2517	12	50	45	2.5	—
SPA	250-3Y	250	255.6	2012	9	50	32	9	—
SPA	250-4	250	255.6	3020	9	65	51	7	—
SPA	250-5	250	255.6	3020	9	80	51	14.5	—
SPA	250-6	250	255.6	3020	9	95	51	22	—
SPA	258-1	258	263.6	2012	10	20	32		6
SPA	258-2	258	263.6	2517	10	35	45		5
SPA	258-3	258	263.6	2517	9	50	45	2.5	
SPA	265-1G	265	270.6	2012	11	20	32	—	6
SPA	265-2G	265	270.6	2517	11	35	45	—	5

SPA | Taper Bushed Pulley

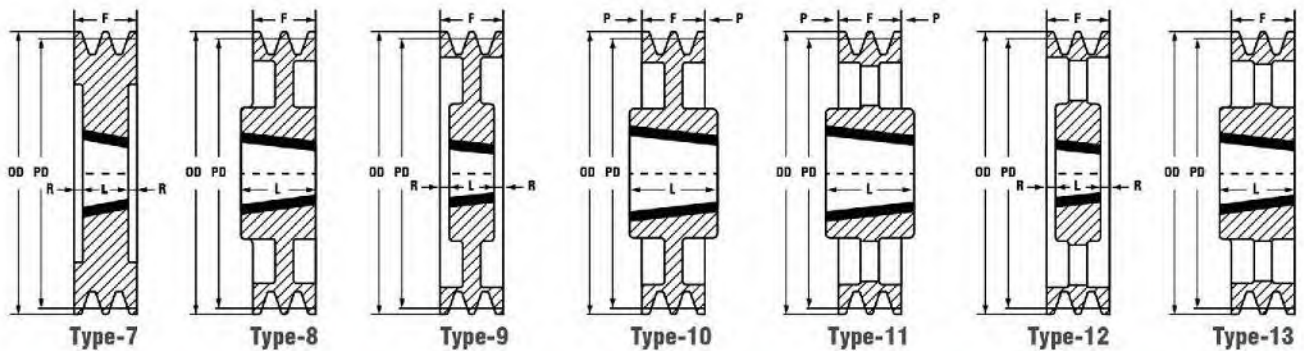


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPA	265-3G	265	270.6	2517	12	50	45	2.5	—
SPA	265-4	265	270.6	3020	9	65	51	7	—
SPA	265-5	265	270.6	3020	9	80	51	14.5	—
SPA	265-6	265	270.6	3535	7	95	89	3	—
SPA	273-1	273	278.6	2012	8	20	32	—	12
SPA	273-2	273	278.6	2517	8	35	45	—	10
SPA	273-3	273	278.6	2517	9	50	45	2.5	—
SPA	280-1	280	285.6	2012	13	20	32	—	12
SPA	280-1Z	280	285.6	2012	11	20	32	—	6
SPA	280-2	280	285.6	2517	13	35	45	—	10
SPA	280-2Z	280	285.6	2517	11	35	45	—	5
SPA	280-3	280	285.6	2517	12	50	45	2.5	—
SPA	280-4	280	285.6	3020	12	65	51	7	—
SPA	280-5	280	285.6	3535	10	80	89	—	4.5
SPA	280-5R	280	285.6	3525	9	80	65	7.5	—
SPA	280-6	280	285.6	3535	9	95	89	3	—
SPA	280-6R	280	285.6	3525	9	95	65	15	—
SPA	300-1	300	305.6	2012	13	20	32	—	12
SPA	300-1G	300	305.6	2012	11	20	32	—	6
SPA	300-2	300	305.6	2517	13	35	45	—	10
SPA	300-2G	300	305.6	2517	11	35	45	—	5
SPA	300-3Y	300	305.6	2517	9	50	45	2.5	—
SPA	300-3	300	305.6	3020	13	50	51	—	1
SPA	300-3G	300	305.6	2517	12	50	45	2.5	—
SPA	300-4	300	305.6	3020	12	65	51	7	—
SPA	300-5	300	305.6	3535	8	80	89	—	9
SPA	300-5R	300	305.6	3525	9	80	65	7.5	—
SPA	300-6	300	305.6	3535	9	95	89	3	—
SPA	300-6R	300	305.6	3525	9	95	65	15	—
SPA	315-1	315	320.6	2012	13	20	32	—	12
SPA	315-1Z	315	320.6	2012	11	20	32	—	6
SPA	315-2	315	320.6	2517	13	35	45	—	10
SPA	315-2Z	315	320.6	2517	11	35	45	—	5
SPA	315-3	315	320.6	3020	11	50	51	—	0.5
SPA	315-4	315	320.6	3020	12	65	51	7	—
SPA	315-4Y	315	320.6	3535	10	65	89	—	12
SPA	315-5	315	320.6	3535	10	80	89	—	4.5
SPA	315-5R	315	320.6	3525	9	80	65	7.5	—
SPA	315-6	315	320.6	3535	9	95	89	3	—
SPA	315-6R	315	320.6	3525	9	95	65	15	—
SPA	325-1G	325	330.6	2012	11	20	32	—	6
SPA	325-2G	325	330.6	2517	11	35	45	—	5
SPA	325-3G	325	330.6	3020	11	50	51	—	0.5


SPA | Taper Bushed Pulley




Type-10



Type-11






Type-12



Type-13


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPA	335-1	335	340.6	2517	11	20	45	—	12.5
SPA	335-2	335	340.6	2517	11	35	45	—	5
SPA	335-3	335	340.6	3020	11	50	51	—	0.5
SPA	335-4	335	340.6	3020	12	65	51	7	—
SPA	335-5	335	340.6	3535	10	80	89	—	4.5
SPA	340-1G	340	345.6	2012	11	20	32	—	6
SPA	340-2G	340	345.6	2517	11	35	45	—	5
SPA	340-3G	340	345.6	3020	11	50	51	—	0.5
SPA	340-4G	340	345.6	3020	12	65	51	7	—
SPA	355-1	355	360.6	2012	13	20	32	—	12
SPA	355-1Z	355	360.6	2012	11	20	32	—	6
SPA	355-2	355	360.6	2517	13	35	45	—	10
SPA	355-2Z	355	360.6	2517	11	35	45	—	5
SPA	355-3	355	360.6	3020	11	50	51	—	0.5
SPA	355-4	355	360.6	3020	12	65	51	7	—
SPA	355-5	355	360.6	3535	11	80	89	—	4.5
SPA	355-5R	355	360.6	3525	12	80	65	7.5	—
SPA	355-6	355	360.6	3535	12	95	89	3	—
SPA	355-6R	355	360.6	3525	12	95	65	15	—
SPA	375-1G	375	380.6	2012	11	20	32	—	6
SPA	375-2G	375	380.6	2517	11	35	45	—	5
SPA	375-3G	375	380.6	3020	11	50	51	—	0.5
SPA	375-4	375	380.6	3020	12	65	51	7	—
SPA	375-5	375	380.6	3535	11	80	89	—	4.5
SPA	400-1	400	405.6	2012	13	20	32	—	12
SPA	400-2	400	405.6	2517	13	35	45	—	10
SPA	400-2Z	400	405.6	2517	11	35	45	—	5
SPA	400-3	400	405.6	3020	13	50	51	—	1
SPA	400-4	400	405.6	3020	12	65	51	7	—
SPA	400-5	400	405.6	3535	11	80	89	—	4.5
SPA	400-5R	400	405.6	3525	12	80	65	7.5	—
SPA	400-6	400	405.6	3535	12	95	89	3	—
SPA	400-6R	400	405.6	3525	12	95	65	15	—
SPA	425-1G	425	430.6	2517	11	20	45	—	12.5
SPA	425-2G	425	430.6	2517	11	35	45	—	5
SPA	425-3	425	430.6	3020	13	50	51	—	1
SPA	425-4	425	430.6	3020	12	65	51	7	—
SPA	425-5	425	430.6	3535	11	80	89	—	4.5
SPA	425-6	425	430.6	3535	12	95	89	3	—
SPA	450-1	450	455.6	2012	13	20	32	—	12
SPA	450-2	450	455.6	2517	13	35	45	—	10
SPA	450-2Z	450	455.6	2517	11	35	45	—	5

SPA | Taper Bushed Pulley

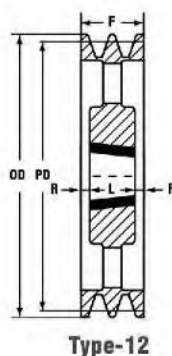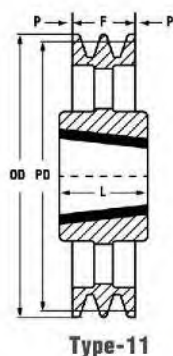

SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPA	450-3	450	455.6	3020	13	50	51	—	1
SPA	450-4	450	455.6	3020	12	65	51	7	—
SPA	450-5	450	455.6	3535	11	80	89	—	4.5
SPA	450-5R	450	455.6	3525	12	80	65	7.5	—
SPA	450-6-	450	455.6	3535	12	95	89	3	—
SPA	450-6R	450	455.6	3525	12	95	65	15	—
SPA	500-1	500	505.6	2517	13	20	45	—	25
SPA	500-2	500	505.6	2517	13	35	45	—	10
SPA	500-2Z	500	505.6	2517	11	35	45	—	5
SPA	500-3	500	505.6	3020	13	50	51	—	1
SPA	500-4	500	505.6	3020	12	65	51	7	—
SPA	500-5	500	505.6	3535	11	80	89	—	4.5
SPA	500-5R	500	505.6	3525	12	80	65	7.5	—
SPA	500-6-	500	505.6	3535	12	95	89	3	—
SPA	500-6R	500	505.6	3525	12	95	65	15	—
SPA	560-2	560	565.6	3020	13	35	51	—	16
SPA	560-3	560	565.6	3020	13	50	51	—	1
SPA	560-4	560	565.6	3535	11	65	89	—	12
SPA	560-4R	560	565.6	3525	12	65	65	0	—
SPA	560-5	560	565.6	3535	11	80	89	—	4.5
SPA	560-6	560	565.6	3535	12	95	89	3	—
SPA	630-1	630	635.6	2517	11	20	45	—	12.5
SPA	630-2	630	635.6	3020	11	35	51	—	8
SPA	630-3	630	635.6	3020	13	50	51	—	1
SPA	630-4	630	635.6	3535	11	65	89	—	12
SPA	630-4R	630	635.6	3525	12	65	65	0	—
SPA	630-5	630	635.6	3535	11	80	89	—	4.5
SPA	630-5R	630	635.6	3525	12	80	65	7.5	—
SPA	630-6	630	635.6	4040	11	95	102	—	3.5
SPA	630-6R	630	635.6	4030	12	95	76	9.5	—
SPA	800-2	800	805.6	3535	11	35	89	—	27
SPA	800-3	800	805.6	3535	11	50	89	—	19.5
SPA	800-3R	800	805.6	3525	11	50	65	—	7.5
SPA	800-4	800	805.6	3535	11	65	89	—	12
SPA	800-4R	800	805.6	3525	12	65	65	0	—
SPA	800-5	800	805.6	4040	11	80	102	—	11
SPA	800-5R	800	805.6	4030	12	80	76	2	—
SPA	800-6	800	805.6	4040	11	95	102	—	3.5
SPA	800-6R	800	805.6	4030	12	95	76	9.5	—
SPA	900-3	900	905.6	3535	11	50	89	—	19.5
SPA	900-4	900	905.6	3535	11	65	89	—	12
SPA	900-5	900	905.6	4040	11	80	102	—	11

SPA | Taper Bushed Pulley

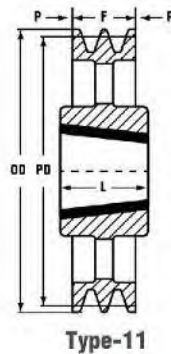

SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPA	900-6	900	905.6	4040	11	95	102	—	3.5
SPA	1000-3	1000	1005.6	3535	11	50	89	—	19.5
SPA	1000-4	1000	1005.6	4040	11	65	102	—	18.5
SPA	1000-5	1000	1005.6	4545	11	80	114	—	17
SPA	1000-6	1000	1005.6	4545	11	95	114	—	9.5

Taper Bushed Pulley SPB


TYPE 80-1250(mm)




SPB | Taper Bushed Pulley



Type-1



Type-5




Type-6

SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPB	80-1	80	87	1108	5	25	22	3	
SPB	80-2	80	87	1108	5	44	22	22	
SPB	85-1	85	92	1108	5	25	22	3	
SPB	85-2	85	92	1108	5	44	22	22	
SPB	90-1	90	97	1210	1	25	25		
SPB	90-2	90	97	1108	5	44	22	22	
SPB	90-3	90	97	1210	5	63	25	38	
SPB	95-1	95	102	1210	1	25	25		
SPB	95-2	95	102	1210	5	44	25	19	
SPB	95-3	95	102	1210	5	63	25	38	
SPB	100-1	100	107	1610	1	25	25		
SPB	100-2	100	107	1610	5	44	25	19	
SPB	100-3	100	107	1610	5	63	25	38	
SPB	100-4	100	107	1615	5	82	38	44	
SPB	100-4Y	100	107	1610	5	82	25	57	
SPB	106-1	106	113	1610	1	25	25		
SPB	106-2	106	113	1610	5	44	25	19	
SPB	106-3	106	113	1610	5	63	25	38	
SPB	106-4	106	113	1615	5	82	38	44	
SPB	112-1	112	119	1610	1	25	25		
SPB	112-2	112	119	1610	5	44	25	19	
SPB	112-2D	112	119	1610	6	44	25	19	
SPB	112-2Y	112	119	2012	5	44	32	12	
SPB	112-3	112	119	1610	5	63	25	38	
SPB	112-3D	112	119	1610	6	63	25	38	
SPB	112-3Y	112	119	2012	5	63	32	31	
SPB	112-4	112	119	2012	5	82	32	50	
SPB	118-1	118	125	1610	1	25	25		
SPB	118-2	118	125	1610	6	44	25	19	
SPB	118-2G	118	125	2012	5	44	32	12	
SPB	118-2Z	118	125	1610	5	44	25	19	
SPB	118-3	118	125	1610	6	63	25	38	
SPB	118-3Z	118	125	1610	5	63	25	38	
SPB	118-3Y	118	125	2012	5	63	32	31	
SPB	118-4	118	125	2012	5	82	32	50	
SPB	125-1	125	132	1610	1	25	25		
SPB	125-2	125	132	2012	6	44	32	12	
SPB	125-3	125	132	2012	6	63	32	31	

SPB | Taper Bushed Pulley




Type-1




Type-5



Type-6




Type-7




Type-10

SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPB	125-4	125	132	2012	7	82	32	25	
SPB	125-5	125	132	2012	5	101	32	69	
SPB	132-1	132	139	1610	1	25	25		
SPB	132-2	132	139	2012	6	44	32	12	
SPB	132-3	132	139	2012	6	63	32	31	
SPB	132-4	132	139	2012	7	82	32	25	
SPB	132-5	132	139	2517	5	101	45	56	
SPB	132-5Z	132	139	2012	7	101	32	34.5	
SPB	132-6	132	139	2012	7	120	32	44	
SPB	140-1	140	147	1610	1	25	25		
SPB	140-2	140	147	2012	6	44	32	12	
SPB	140-3	140	147	2012	6	63	32	31	
SPB	140-3Y	140	147	2517	6	63	45	18	
SPB	140-4	140	147	2517	7	82	45	18.5	
SPB	140-4Z	140	147	2517	6	82	45	37	
SPB	140-5	140	147	2517	7	101	45	28	
SPB	140-5Z	140	147	2517	6	101	45	56	
SPB	140-6	140	147	2517	7	120	45	37.5	
SPB	140-8	140	147	2517	7	158	45	56.5	
SPB	145-1	145	152	1610	1	25	25		
SPB	145-2	145	152	2012	6	44	32	12	
SPB	145-3	145	152	2012	6	63	32	31	
SPB	145-4	145	152	2517	7	82	45	18.5	
SPB	145-6	145	152	2517	7	120	45	37.5	
SPB	150-1	150	157	1610	10	25	25		0
SPB	150-2	150	157	2012	6	44	32	12	
SPB	150-3	150	157	2517	6	63	45	18	
SPB	150-4	150	157	2517	7	82	45	18.5	
SPB	150-4Z	150	157	2517	6	82	45	37	
SPB	150-5	150	157	2517	7	101	45	28	
SPB	150-6	150	157	2517	7	120	45	37.5	
SPB	155-1	155	162	1610	10	25	25		0
SPB	155-2	155	162	2012	6	44	32	12	
SPB	155-3	155	162	2517	6	63	45	18	
SPB	155-4	155	162	2517	7	82	45	18.5	
SPB	155-5	155	162	2517	7	101	45	28	
SPB	155-6	155	162	2517	7	120	45	37.5	
SPB	160-1	160	167	1610	10	25	25		0
SPB	160-2	160	167	2012	6	44	32	12	


SPB | Taper Bushed Pulley




Type-4




Type-6



Type-7







Type-8



Type-10






SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPB	160-3	160	167	2517	6	63	45	18	
SPB	160-4	160	167	2517	7	82	45	18.5	
SPB	160-5	160	167	2517	7	101	45	28	
SPB	160-6	160	167	3020	7	123	51	34.5	
SPB	160-8	160	167	3020	7	158	51	53.5	
SPB	165-1	165	172	1610	10	25	25		0
SPB	165-2	165	172	2012	6	44	32	12	
SPB	165-3	165	172	2517	6	63	45	18	
SPB	165-4	165	172	2517	7	82	45	18.5	
SPB	165-5	165	172	2517	7	101	45	28	
SPB	165-6	165	172	3020	7	120	45	34.5	
SPB	170-1	170	177	1610	10	25	25		0
SPB	170-2	170	177	2012	6	44	32	12	
SPB	170-2Y	170	177	2517	4	44	45		
SPB	170-3	170	177	2517	6	63	45	18	
SPB	170-4	170	177	2517	7	82	45	18.5	
SPB	170-5	170	177	3020	7	101	51	25	
SPB	170-6	170	177	3020	7	120	51	34.5	
SPB	170-8	170	177	3020	7	158	76	41	
SPB	170-8R	170	177	3020	7	158	51	53.5	
SPB	175-1	175	182	1610	10	25	25		0
SPB	175-2	175	182	2517	4	44	45		
SPB	175-3	175	182	2517	6	63	45	18	
SPB	175-4	175	182	2517	7	82	45	18.5	
SPB	175-5	175	182	3020	7	101	51	25	
SPB	180-1	180	187	1610	10	25	25		0
SPB	180-2	180	187	2517	4	44	45		
SPB	180-3	180	187	2517	6	63	45	18	
SPB	180-4	180	187	2517	7	82	45	18.5	
SPB	180-5	180	187	3020	7	101	51	25	
SPB	180-6	180	187	3020	7	120	51	34.5	
SPB	180-8	180	187	3020	7	158	76	41	
SPB	180-8R	180	187	3020	7	158	51	53.5	
SPB	185-1	185	192	2012	10	25	32		3.5
SPB	185-2	185	192	2517	4	44	45		
SPB	185-3	185	192	2517	6	63	45	18	
SPB	185-4	185	192	2517	7	82	45	18.5	
SPB	190-1	190	197	2012	10	25	32		3.5
SPB	190-1Z	190	197	2012	8	25	32		7
SPB	190-2	190	197	2517	4	44	45		

SPB | Taper Bushed Pulley

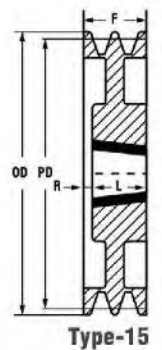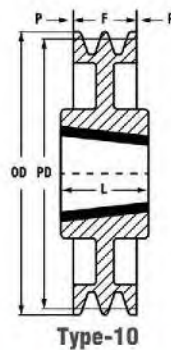


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPB	190-3	190	197	2517	6	63	45	18	
SPB	190-4	190	197	2517	7	82	45	18.5	
SPB	190-4	190	197	2517	6	82	45	37	
SPB	190-5	190	197	3020	7	101	51	25	
SPB	190-6	190	197	3020	7	120	51	34.5	
SPB	190-8	190	197	3030	7	158	76	41	
SPB	190-8	190	197	3020	7	158	51	53.5	
SPB	190-10	190	197	3535	7	196	89	53.5	
SPB	195-1	195	202	2012	10	25	32		3.5
SPB	195-2	195	202	2517	8	44	45		1
SPB	195-3	195	202	2517	6	63	45	18	
SPB	195-4	195	202	2517	7	82	45	18.5	
SPB	195-5	195	202	3020	7	101	51	25	
SPB	195-6	195	202	3020	7	120	51	34.5	
SPB	200-1	200	207	2012	10	25	32		3.5
SPB	200-1	200	207	2012	4	25	32		1
SPB	200-2	200	207	2517	8	44	45		1
SPB	200-2	200	207	2517	8	44	45		
SPB	200-3	200	207	2517	6	63	45	18	
SPB	200-3	200	207	2517	9	63	45	9	
SPB	200-4	200	207	3020	7	82	51	15.5	
SPB	200-4	200	207	3020	6	82	51	31	
SPB	200-5	200	207	3020	7	101	51	25	
SPB	200-5	200	207	3020	6	101	51	50	
SPB	200-6	200	207	3020	7	120	51	34.5	
SPB	200-8	200	207	3535	7	158	89	34.5	
SPB	200-8	200	207	3525	7	158	65	46.5	
SPB	200-10	200	207	3535	7	196	89	53.5	
SPB	200-10	200	207	3525	7	196	65	65.5	
SPB	206-1	206	213	2012	10	25	32		3.5
SPB	206-2	206	213	2517	8	44	45		1
SPB	206-3	206	213	2517	15	63	45	18	

SPB | Taper Bushed Pulley

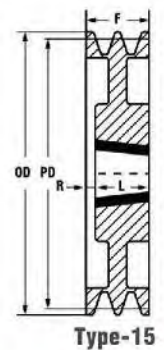


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPB	206-4	206	213	3020	7	82	51	15.5	
SPB	210-2	210	217	2517	8	44	45		1
SPB	210-3	210	217	2517	15	63	45	18	
SPB	210-4	210	217	3020	7	82	51	15.5	
SPB	212-1	212	219	2012	10	25	32		3.5
SPB	212-1D	212	219	2012	4	25	32		
SPB	212-1Z	212	219	2012	8	25	32		7
SPB	212-2	212	219	2517	8	44	45		1
SPB	212-2D	212	219	2517	4	44	45		
SPB	212-3	212	219	2517	15	63	45	18	
SPB	212-4	212	219	3020	7	82	51	15.5	
SPB	212-4Z	212	219	3020	6	82	51	31	
SPB	212-5	212	219	3020	7	101	51	25	
SPB	212-5Z	212	219	3020	6	101	51	50	
SPB	212-6	212	219	3525	7	120	89	15.5	
SPB	212-6R	212	219	3525	7	120	65	27.5	
SPB	212-8	212	219	3535	7	158	89	34.5	
SPB	212-8R	212	219	3525	7	158	65	46.5	
SPB	212-10	212	219	3535	7	196	89	53.5	
SPB	212-12	212	219	3535	7	234	89	72.5	
SPB	215-1	215	222	2012	10	25	32		3.5
SPB	215-2	215	222	2517	8	44	45		1
SPB	215-3	215	222	2517	15	63	45	18	
SPB	215-4	215	222	3020	7	82	51	15.5	
SPB	218-1	218	225	2012	10	25	32		3.5
SPB	218-2	218	225	2517	8	44	45		1
SPB	218-3	218	225	2517	15	63	45	18	
SPB	218-4	218	225	3020	7	82	51	15.5	
SPB	218-5	218	225	3020	7	101	51	25	
SPB	218-6	218	225	3535	7	120	89	15.5	

SPB | Taper Bushed Pulley

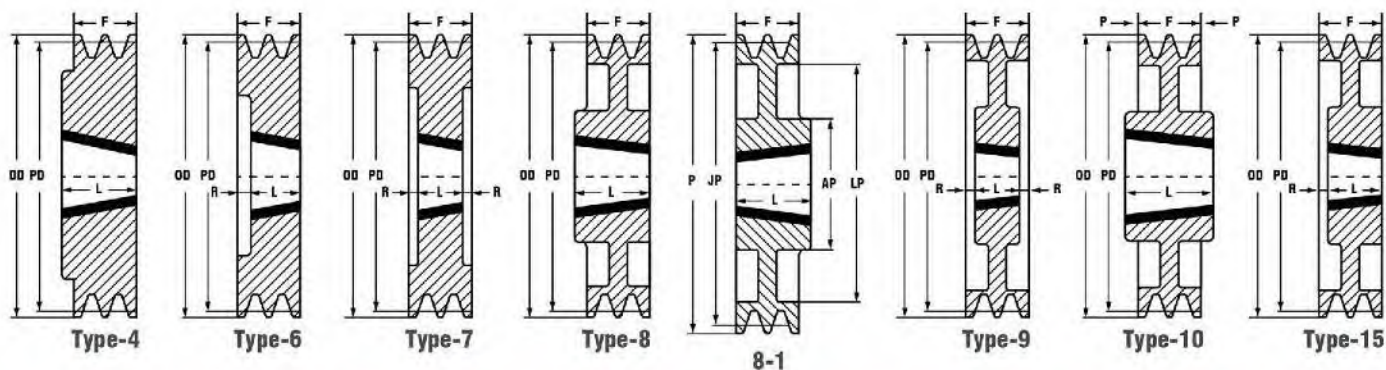


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPB	224-1	224	231	2012	10	25	32		3.5
SPB	224-1Z	224	231	2012	8	25	32		7
SPB	224-2D	224	231	2517	4	44	45		
SPB	224-2	224	231	2517	8	44	45		1
SPB	224-2Y	224	231	2517	8-1	44	45		
SPB	224-3	224	231	2517	15	63	45	18	
SPB	224-3D	224	231	2517	6	63	45	18	
SPB	224-4	224	231	3020	7	82	51	15.5	
SPB	224-4Z	224	231	3020	6	82	51	31	
SPB	224-5	224	231	3020	7	101	51	25	
SPB	224-5Z	224	231	3020	6	101	51	50	
SPB	224-6	224	231	3535	7	120	89	15.5	
SPB	224-6R	224	231	3535	7	120	65	27.5	
SPB	224-8	224	231	3535	7	158	89	34.5	
SPB	224-8R	224	231	3535	7	158	65	46.5	
SPB	224-10	224	231	3535	7	196	89	53.5	
SPB	230-1	230	237	2012	10	25	32		3.5
SPB	230-2	230	237	2517	8	44	45		1
SPB	230-3	230	237	2517	15	63	45	18	
SPB	230-4	230	237	3020	7	82	51	15.5	
SPB	230-5	230	237	3535	6	101	89	12	
SPB	230-6	230	237	3535	7	120	89	15.5	
SPB	236-1	236	243	2012	10	25	32		3.5
SPB	236-1Z	236	243	2012	8	25	32		7
SPB	236-2	236	243	2517	8	44	45		
SPB	236-2D	236	243	2517	8-1	44	45		1
SPB	236-3	236	243	2517	15	63	45	18	
SPB	236-3Z	236	243	2517	9	63	45	9	
SPB	236-4	236	243	3020	9	82	51	15.5	
SPB	236-5	236	243	3535	7	101	89	6	

SPB | Taper Bushed Pulley

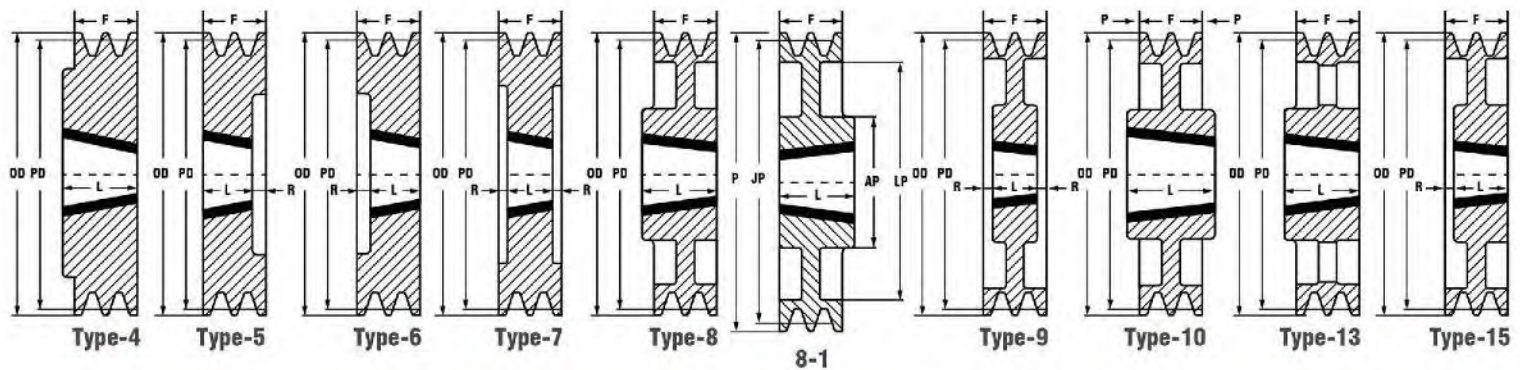


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPB	236-5R	236	243	3525	7	101	65	18	
SPB	236-5Z	236	243	3535	5	101	89	12	
SPB	236-6	236	243	3535	7	120	89	15.5	
SPB	236-6R	236	243	3525	7	120	65	27.5	
SPB	236-8	236	243	3535	7	158	89	34.5	
SPB	236-8R	236	243	3525	7	158	65	46.5	
SPB	236-10	236	243	3535	7	196	89	53.5	
SPB	243-1	243	250	2012	10	25	32		3.5
SPB	243-2	243	250	2517	8	44	45		1
SPB	243-3	243	250	3020	15	63	51	12	
SPB	243-4	243	250	3020	9	82	51	15.5	
SPB	250-1	250	257	2012	10	25	32		3.5
SPB	250-1D	250	257	2012	4	25	32		
SPB	250-1G	250	257	2012	13	25	32		7
SPB	250-2	250	257	2517	8	44	45		1
SPB	250-2D	250	257	2517	8-1				
SPB	250-2G	250	257	2517	13	44	45		1
SPB	250-3	250	257	3020	15	63	51	12	
SPB	250-3D	250	257	3020	6	63	51	12	
SPB	250-4	250	257	3020	9	82	51	15.5	
SPB	250-4D	250	257	3020	6	82	51	31	
SPB	250-4Z	250	257	3020	15	82	51	31	
SPB	250-5	250	257	3535	7	101	89	6	
SPB	250-5R	250	257	3525	7	101	65	18	
SPB	250-5Z	250	257	3535	6	101	89	12	
SPB	250-6	250	257	3535	7	120	89	15.5	
SPB	250-6R	250	257	3525	7	120	65	27.5	
SPB	250-8	250	257	3535	7	158	89	34.5	
SPB	250-8R	250	257	3525	7	158	65	46.5	

SPB | Taper Bushed Pulley

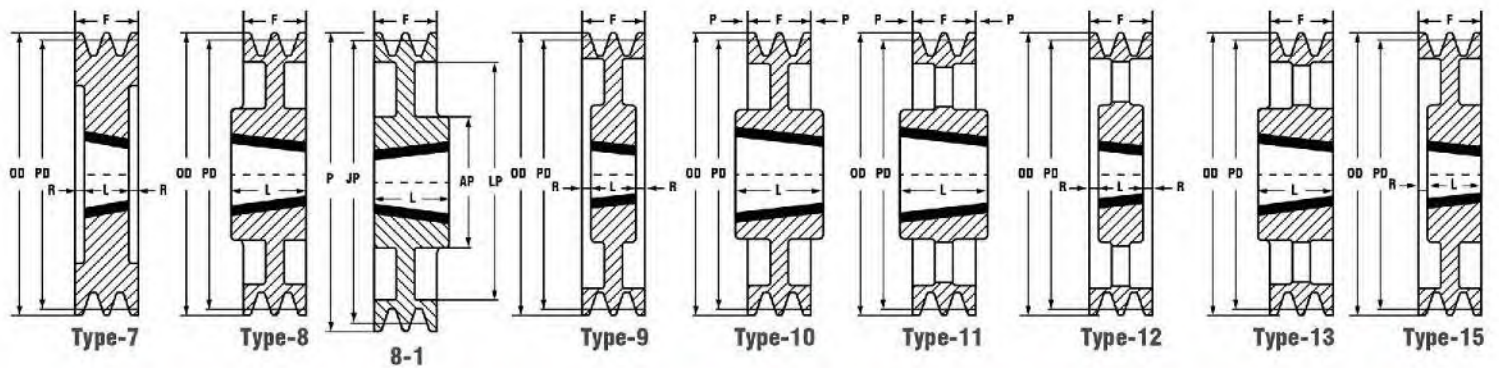


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPB	250-10	250	257	3535	7	196	89	53.5	
SPB	250-10R	250	257	3525	7	196	65	65.5	
SPB	258-1	258	265	2012	10	25	32		3.5
SPB	258-2	258	265	2517	8	44	45		1
SPB	258-3	258	265	3020	15	63	51	12	
SPB	258-4	258	265	3020	9	82	51	15.5	
SPB	265-1G	265	272	2012	13	25	32		7
SPB	265-2G	265	272	2517	13	44	45		1
SPB	265-3G	265	272	3020	9	63	51	6	
SPB	265-4G	265	272	3020	9	82	51	15.5	
SPB	265-5	265	272	3535	7	101	89	6	
SPB	265-5G	265	272	3525	7	101	65	18.5	
SPB	265-6G	265	272	3535	7	120	89	15.5	
SPB	265-6R	265	272	3525	7	120	65	27.5	
SPB	265-8G	265	272	3535	7	158	89	34.5	
SPB	265-8R	265	272	3525	7	158	65	46.5	
SPB	273-1	273	280	2012	10	25	32		3.5
SPB	273-2	273	280	2517	8	44	45		1
SPB	273-3	273	280	3020	9	63	51	6	
SPB	273-4	273	280	3020	9	82	51	15.5	
SPB	280-1	280	287	2012	11	25	32		3.5
SPB	280-1G	280	287	2012	13	25	32		7
SPB	280-2G	280	287	2517	13	44	45		1
SPB	280-2D	280	287	2517	8-1	44	45		
SPB	280-3G	280	287	3020	12	63	51	6	
SPB	280-4	280	287	3020	9	82	51	15.5	
SPB	280-5	280	287	3535	9	101	89	6	
SPB	280-5R	280	287	3525	9	101	65	18	
SPB	280-6	280	287	3535	9	120	89	15.5	
SPB	280-6R	280	287	3525	9	120	65	27.5	
SPB	280-8	280	287	3535	9	158	89	34.5	
SPB	280-8R	280	287	3525	9	158	65	46.5	
SPB	280-10	280	287	3535	9	196	89	53.5	
SPB	280-10R	280	287	3525	9	196	65	65.5	
SPB	290-2	290	297	2517	8	44	45		1
SPB	290-3	290	297	3020	9	63	51	6	
SPB	290-4	290	297	3535	8	82	89		7
SPB	300-1G	300	307	2012	13	25	32		7

SPB | Taper Bushed Pulley

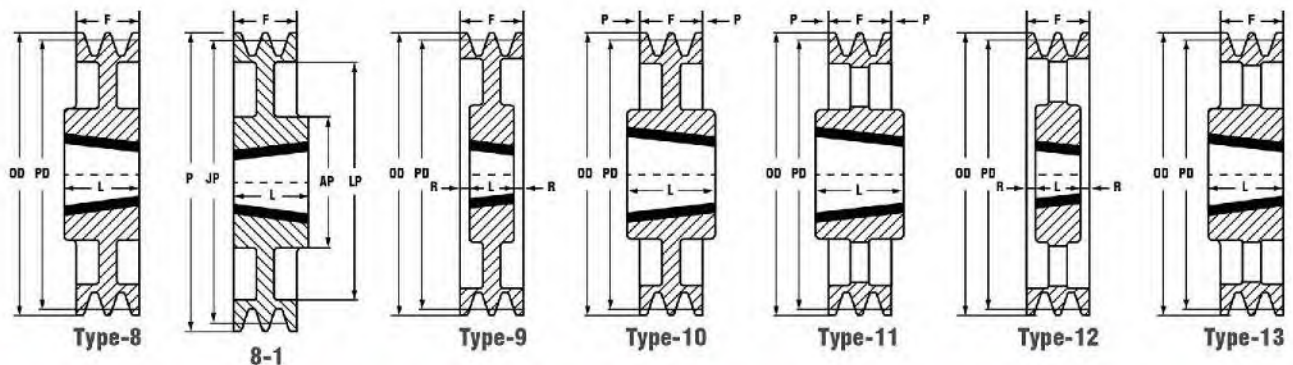






SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPB	300-2D	300	307	2517	8-1	44	45		
SPB	300-2G	300	307	2517	13	44	45		1
SPB	300-3G	300	307	3020	12	63	51	6	
SPB	300-4	300	307	3535	8	82	89		7
SPB	300-4R	300	307	3525	9	82	65	8.5	
SPB	300-4Z	300	307	3020	9	82	51	15.5	
SPB	300-5	300	307	3535	9	101	89	6	
SPB	300-5R	300	307	3525	9	101	65	18	
SPB	300-6	300	307	3535	9	120	89	15.5	
SPB	300-6R	300	307	3525	9	120	65	27.5	
SPB	300-8	300	307	3535	9	158	89	34.5	
SPB	300-8R	300	307	3525	9	158	65	46.5	
SPB	300-10	300	307	3535	9	196	89	53.5	
SPB	305-2	305	312	2517	8	44	45		1
SPB	305-3	305	312	3020	9	63	51	6	
SPB	305-4	305	312	3535	8	82	89		7
SPB	310-2	310	317	2517	8	44	45		1
SPB	310-3	310	317	3020	9	63	51	6	
SPB	310-4	310	317	3535	10	82	89		3.5
SPB	315-1	315	322	2012	11	25	32		3.5
SPB	315-1G	315	322	2012	13	25	32		7
SPB	315-2G	315	322	2517	13	44	45		1
SPB	315-2D	315	322	2517	8-1	44	45		
SPB	315-3G	315	322	3020	12	63	51	6	
SPB	315-4	315	322	3535	11	82	89		3.5
SPB	315-4R	315	322	3525	12	82	65	8.5	
SPB	315-5	315	322	3535	9	101	89	6	
SPB	315-5R	315	322	3525	9	101	65	18	
SPB	315-6	315	322	3535	9	120	89	15.5	
SPB	315-6R	315	322	3525	9	120	65	27.5	
SPB	315-8	315	322	3535	9	158	89	34.5	
SPB	315-8R	315	322	3525	9	158	65	46.5	
SPB	315-10	315	322	3535	9	196	89	53.5	
SPB	325-2	325	332	2517	8	44	45		1
SPB	325-3	325	332	3020	9	63	51	6	
SPB	325-4	325	332	3535	10	82	89		3.5
SPB	335-1	335	342	2517	11	25	45		10
SPB	335-2G	335	342	2517	13	44	45		1

SPB | Taper Bushed Pulley

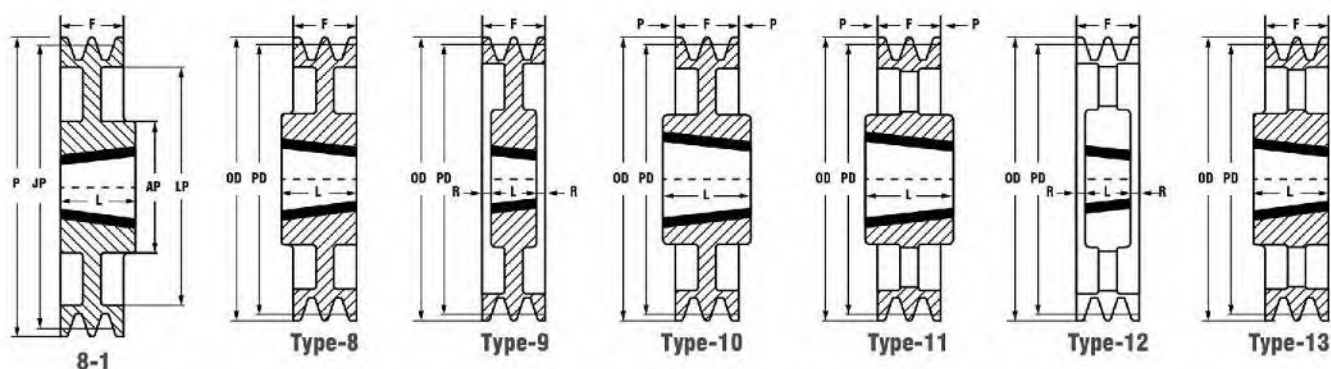


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPB	335-2D	335	342	2517	8-1	44	45		
SPB	335-3	335	342	3020	12	63	51	6	
SPB	335-4	335	342	3535	11	82	89		3.5
SPB	335-4R	335	342	3525	12	82	65	8.5	
SPB	335-5	335	342	3535	9	101	89	6	
SPB	335-5R	335	342	3525	9	101	65	18	
SPB	335-6	335	342	3535	9	120	89	15.5	
SPB	335-6R	335	342	3525	9	120	65	27.5	
SPB	335-8	335	342	3535	9	158	89	34.5	
SPB	335-8R	335	342	3525	9	158	65	46.5	
SPB	335-10	335	342	3535	9	196	89	53.5	
SPB	340-2G	340	347	2517	13	44	45		1
SPB	340-3G	340	347	3020	12	63	51	6	
SPB	340-4G	340	347	3535	12	82	65	8.5	
SPB	340-5G	340	347	3525	12	101	65	18	
SPB	340-6G	340	347	3535	12	120	89	15.5	
SPB	345-2	345	352	3020	8	44	51		7
SPB	345-3	345	352	3020	9	63	51	6	
SPB	345-4	345	352	3535	10	82	89		3.5
SPB	345-5	345	352	3535	12	101	89	6	
SPB	355-2	355	362	3020	11	44	51		3.5
SPB	355-2G	355	362	3020	13	44	51		7
SPB	355-3G	355	362	3020	12	63	51	6	
SPB	355-4	355	362	3535	11	82	89		3.5
SPB	355-4G	355	362	3525	12	82	65	8.5	
SPB	355-5	355	362	3535	9	101	89	6	
SPB	355-5R	355	362	3525	9	101	65	18	
SPB	355-6	355	362	3535	9	120	89	15.5	
SPB	355-6R	355	362	3525	9	120	65	27.5	
SPB	355-8	355	362	3535	9	158	89	34.5	
SPB	355-8R	355	362	3525	9	158	65	46.5	
SPB	355-10	355	362	4040	9	196	102	47	
SPB	375-2	375	382	3020	11	44	51		3.5
SPB	375-2G	375	382	3020	13	44	51		7
SPB	375-3G	375	382	3020	12	63	51	6	
SPB	375-4	375	382	3535	11	82	89		3.5
SPB	375-4R	375	382	3525	12	82	65	8.5	
SPB	375-5	375	382	3535	12	101	89	6	
SPB	375-5G	375	382	3525	12	101	65	18	

SPB | Taper Bushed Pulley




SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPB	375-6G	375	382	3535	12	120	89	15.5	
SPB	375-6R	375	382	3525	12	120	65	27.5	
SPB	375-8	375	382	4040	9	158	102	28	
SPB	375-8R	375	382	4030	9	158	76	41	
SPB	400-1	400	407	2517	11	25	45		10
SPB	400-2	400	407	3020	11	44	51		3.5
SPB	400-3	400	407	3535	11	63	89		13
SPB	400-3G	400	407	3525	11	63	65		1
SPB	400-4	400	407	3535	11	82	89		3.5
SPB	400-4G	400	407	3525	12	82	65	8.5	
SPB	400-5	400	407	3535	12	101	89	6	
SPB	400-5R	400	407	3525	12	101	65	18	
SPB	400-6	400	407	3535	12	120	89	15.5	
SPB	400-6R	400	407	3525	12	120	65	27.5	
SPB	400-8	400	407	4040	9	158	102	28	
SPB	400-8R	400	407	3525	9	158	65	46.5	
SPB	400-10	400	407	4020	9	196	103	47	
SPB	425-2G	425	432	3020	11	44	51		3.5
SPB	425-3	425	432	3535	11	63	89		13
SPB	425-3G	425	432	3525	11	63	65		1
SPB	425-3Y	425	432	3020	12	63	51	6	
SPB	425-4	425	432	3535	11	82	89		3.5
SPB	425-4G	425	432	3525	12	82	65	8.5	
SPB	425-5G	425	432	3535	12	101	89	6	
SPB	425-5R	425	432	3525	12	101	65	18	
SPB	425-6G	425	432	3535	12	120	89	15.5	
SPB	425-6R	425	432	3525	12	120	65	27.5	
SPB	425-6Z	425	432	4040	9	120	102	9	
SPB	450-2	450	457	3020	11	44	51		3.5
SPB	450-3	450	457	3535	13	63	89		26
SPB	450-3R	450	457	3525	13	63	65		2
SPB	450-3Z	450	457	3535	11	63	89		13
SPB	450-4	450	457	3535	13	82	89		7
SPB	450-4R	450	457	3525	16	82	65	17	
SPB	450-4Z	450	457	3535	11	82	89		3.5
SPB	450-5	450	457	3535	16	101	89	12	
SPB	450-5R	450	457	3525	16	101	65	36	
SPB	450-5Z	450	457	3535	12	101	89	6	
SPB	450-6	450	457	4040	16	120	102	18	
SPB	450-6R	450	457	3525	16	120	65	55	
SPB	450-6Z	450	457	4040	12	120	102	9	
SPB	450-8	450	457	4040	12	158	102	28	


SPB | Taper Bushed Pulley




Type-11




Type-12



Type-13




Type-16




Type-17

SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPB	450-8R	450	457	3525	12	158	65	46.5	
SPB	450-10	450	457	4545	12	196	114	41	
SPB	475-1	475	482	2517	13	25	45		20
SPB	475-2	475	482	3020	13	44	51		7
SPB	475-3	475	482	3535	13	63	89		26
SPB	475-4	475	482	3535	11	82	89		3.5
SPB	475-4R	475	482	3525	12	82	65	8.5	
SPB	475-5G	475	482	3535	12	101	89	6	
SPB	475-5R	475	482	3525	12	101	65	18	
SPB	475-8	475	482	4040	12	158	102	28	
SPB	500-2	500	507	3020	11	44	51		3.5
SPB	500-3	500	507	3535	13	63	89		26
SPB	500-3R	500	507	3525	13	63	65		2
SPB	500-3Z	500	507	3535	11	63	89		13
SPB	500-4	500	507	3535	13	82	89		7
SPB	500-4R	500	507	3525	16	82	65	17	
SPB	500-4Z	500	507	3535	11	82	89		3.5
SPB	500-5	500	507	3535	16	101	89	12	
SPB	500-5R	500	507	3525	16	101	65	36	
SPB	500-5Z	500	507	3535	12	101	89	6	
SPB	500-6	500	507	4040	16	120	102	18	
SPB	500-6R	500	507	3525	16	120	65	55	
SPB	500-6Z	500	507	4040	12	120	102	9	
SPB	500-8	500	507	4040	12	158	102	28	
SPB	500-8R	500	507	3525	12	158	65	46.5	
SPB	500-10	500	507	4545	12	196	114	41	
SPB	530-2	530	537	3030	11	44	76		16
SPB	530-2R	530	537	3020	11	44	51		7
SPB	530-3	530	537	3535	11	63	89		13
SPB	530-3R	530	537	3525	13	63	65		2
SPB	530-4	530	537	3535	13	82	89		7
SPB	530-4R	530	537	3525	12	82	65	8.5	
SPB	560-2	560	567	3030	17	44	76		28.5
SPB	560-2R	560	567	3020	11	44	51		3.5
SPB	560-2Z	560	567	3030	11	44	76		16
SPB	560-3	560	567	3535	13	63	89		26
SPB	560-3R	560	567	3525	13	63	65		2
SPB	560-3Z	560	567	3535	11	63	89		13


SPB | Taper Bushed Pulley




Type-11



Type-12






Type-13



Type-16


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPB	560-4	560	567	3535	13	82	89		7
SPB	560-4R	560	567	3525	16	82	65	17	7
SPB	560-4Z	560	567	3535	11	82	89		3.5
SPB	560-5	560	567	4040	13	101	102		1
SPB	560-5G	560	567	3535	12	101	89	6	
SPB	560-5R	560	567	3525	16	101	65	36	
SPB	560-6	560	567	4040	16	120	102	18	
SPB	560-6R	560	567	3525	16	120	65	55	
SPB	560-6Z	560	567	4040	12	120	102	9	
SPB	560-8	560	567	4545	12	158	114	22	
SPB	560-8R	560	567	4030	12	158	76	41	
SPB	560-10	560	567	4545	12	196	114	41	
SPB	630-2	630	637	3030	11	44	76		16
SPB	630-2R	630	637	3020	11	44	51		3.5
SPB	630-3	630	637	3535	13	63	89		26
SPB	630-3R	630	637	3525	13	63	65		2
SPB	630-3Z	630	637	3535	11	63	89		13
SPB	630-4	630	637	3535	13	82	89		7
SPB	630-4R	630	637	3525	16	82	65	17	
SPB	630-4Z	630	637	3535	11	82	89		3.5
SPB	630-5	630	637	4040	13	101	102		1
SPB	630-5R	630	637	3525	16	101	65	36	
SPB	630-6	630	637	4040	16	120	102	18	
SPB	630-6R	630	637	3525	16	120	65	55	
SPB	630-6Z	630	637	4040	12	120	102	9	
SPB	630-8	630	637	4545	12	158	114	22	
SPB	630-8R	630	637	4030	12	158	76	41	
SPB	630-10	630	637	4545	12	196	114	41	
SPB	710-2	710	717	3030	11	44	76		16
SPB	710-3	710	717	3535	11	63	89		13
SPB	710-3R	710	717	3525	11	63	65		1
SPB	710-4	710	717	3535	11	82	89		3.5
SPB	710-4R	710	717	3525	12	82	65	8.5	
SPB	710-5	710	717	4040	13	101	102		1
SPB	710-5R	710	717	4030	12	101	76	12.5	
SPB	710-6	710	717	4040	12	120	102	9	
SPB	710-6R	710	717	4535	12	120	89	15.5	
SPB	710-6Z	710	717	4545	12	120	114	3	
SPB	710-8	710	717	4545	12	158	114	22	
SPB	710-8R	710	717	4535	12	158	89	34.5	
SPB	710-10	710	717	4545	12	196	114	41	
SPB	800-2	800	807	3535	11	44	89		22.5

SPB | Taper Bushed Pulley



SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPB	800-3	800	807	3535	11	63	89		13
SPB	800-3R	800	807	3525	11	63	65		1
SPB	800-4	800	807	4040	11	82	102		10
SPB	800-4R	800	807	4030	12	82	76	3	
SPB	800-5	800	807	4040	13	101	102		1
SPB	800-5R	800	807	4030	12	101	76	12.5	
SPB	800-6	800	807	4545	12	120	114	3	
SPB	800-6R	800	807	4535	12	120	89	15.5	
SPB	800-8	800	807	4545	12	158	114	22	
SPB	800-8R	800	807	4535	12	158	89	34.5	
SPB	800-10	800	807	4545	12	196	114	41	
SPB	900-3	900	907	3535	11	63	89		13
SPB	900-3R	900	907	3525	11	63	65		1
SPB	900-4	900	907	4040	11	82	102		10
SPB	900-4R	900	907	4030	12	82	76	3	
SPB	900-5	900	907	4040	13	101	102		1
SPB	900-5R	900	907	4030	12	101	76	12.5	
SPB	900-6	900	907	4545	12	120	114	3	
SPB	900-6R	900	907	4535	12	120	89	15.5	
SPB	900-8	900	907	4545	12	158	114	22	
SPB	900-8R	900	907	4535	12	158	89	34.5	
SPB	900-10	900	907	5050	12	196	127	34.5	
SPB	1000-3	1000	1007	4040	11	63	102		19.5
SPB	1000-3R	1000	1007	4030	11	63	76		6.5
SPB	1000-4	1000	1007	4040	11	82	102		10
SPB	1000-4R	1000	1007	4030	12	82	76	3	
SPB	1000-5	1000	1007	4545	11	101	114		6.5
SPB	1000-5R	1000	1007	4535	12	101	89	6	
SPB	1000-6	1000	1007	4545	12	120	114	3	
SPB	1000-6R	1000	1007	4535	12	120	89	15.5	
SPB	1000-8	1000	1007	5050	12	158	127	15.5	
SPB	1000-8R	1000	1007	4535	12	158	89	34.5	
SPB	1000-10	1000	1007	5050	12	196	127	34.5	
SPB	1120-3	1120	1127	4040	11	63	102		19.5
SPB	1120-5	1120	1127	4545	11	101	114		6.5
SPB	1120-8	1120	1127	4545	12	158	114	22	
SPB	1250-3	1250	1257	4545	11	63	114		25.5
SPB	1250-3R	1250	1257	4535	11	63	89		13
SPB	1250-4	1250	1257	4545	11	82	114		16
SPB	1250-4R	1250	1257	4535	11	82	89		3.5
SPB	1250-5	1250	1257	4545	11	101	114		6.5
SPB	1250-5R	1250	1257	4535	12	101	89	6	

SPB | Taper Bushed Pulley



Type-12


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPB	1250-6	1250	1257	4545	12	120	114	3	
SPB	1250-6R	1250	1257	4535	12	120	89	15.5	
SPB	1250-8	1250	1257	5050	12	158	127	15.5	
SPB	1250-8R	1250	1257	5040	12	158	114	22	
SPB	1250-12	1250	1257	5050	12	234	127	53.5	

Taper Bushed Pulley SPC


TYPE 160-1250(mm)




SPC | Taper Bushed Pulley



Type-4




Type-7




Type-9

SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPC	160-1	160	169.6	2517	4	34	45		
SPC	160-3	160	169.6	2517	7	85	45	20	
SPC	160-4	160	169.6	2517	7	110.5	45	32.8	
SPC	170-3	170	179.6	2517	7	85	45	20	
SPC	170-4	170	179.6	2517	7	110.5	45	32.8	
SPC	180-2	180	189.6	2517	7	59.5	45	7.3	
SPC	180-3	180	189.6	2517	7	85	45	20	
SPC	180-4	180	189.6	2517	7	110.5	45	32.8	
SPC	180-5	180	189.6	3020	7	136	51	45.5	
SPC	180-6	180	189.6	3020	7	161.5	51	55.3	
SPC	180-8	180	189.6	3030	7	212.5	76	68.3	
SPC	190-2	190	199.6	2517	7	59.5	45	7.3	
SPC	190-3	190	199.6	2517	7	85	45	20	
SPC	190-4	190	199.6	3020	7	110.5	51	29.8	
SPC	190-5	190	199.6	3020	7	136	51	42.5	
SPC	190-6	190	199.6	3020	7	161.5	51	55.3	
SPC	200-1	200	209.6	2517	4	34	45		
SPC	200-21G	200	209.6	2517	7	59.5	45	7.3	
SPC	200-3	200	209.6	2517	7	85	45	20	
SPC	200-4	200	209.6	3020	7	110.5	51	29.8	
SPC	200-5	200	209.6	3535	7	136	89	23.5	
SPC	200-5R	200	209.6	3525	7	136	65	35.5	
SPC	200-6	200	209.6	3535	7	161.5	89	36.3	
SPC	200-6R	200	209.6	3525	7	161.5	65	48.3	
SPC	200-8	200	209.6	3535	7	212.5	89	61.8	
SPC	200-8R	200	209.6	3525	7	212.5	65	73.8	
SPC	212-2G	212	221.6	2517	9	59.5	45	7.3	
SPC	212-3	212	221.6	3020	7	85	51	12	
SPC	212-4	212	221.6	3020	7	110.5	51	29.8	
SPC	212-5	212	221.6	3535	7	136	89	23.5	
SPC	212-5R	212	221.6	3525	7	136	65	35.5	
SPC	212-6	212	221.6	3535	7	161.5	89	36.3	
SPC	212-6R	212	221.6	3525	7	161.5	65	48.3	
SPC	212-8	212	221.6	3535	7	212.5	89	61.8	
SPC	212-8R	212	221.6	3525	7	212.5	65	73.8	
SPC	212-10	212	221.6	3535	7	263.5	89	87.3	
SPC	224-2	224	233.6	3020	7	59.5	51	4.3	
SPC	224-2G	224	233.6	2517	9	59.6	45	7.3	
SPC	224-3	224	233.6	3020	7	85	51	17	
SPC	224-4	224	233.6	3535	7	110.5	89	10.8	
SPC	224-4R	224	233.6	3525	7	110.5	65	22.8	
SPC	224-5	224	233.6	3535	7	136	89	23.5	


SPC | Taper Bushed Pulley




Type-4



Type-7






Type-9



Type-10


SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPC	224-5R	224	233.6	3525	7	136	65	35.5	
SPC	224-6	224	233.6	3535	7	161.5	89	36.3	
SPC	224-6R	224	233.6	3525	7	161.5	65	48.3	
SPC	224-8	224	233.6	3535	7	212.5	89	61.8	
SPC	224-8R	224	233.6	3525	7	212.5	65	73.8	
SPC	224-10	224	233.6	4040	7	263.5	102	80.8	
SPC	236-2G	236	245.6	2517	9	59.5	51	4.3	
SPC	236-3	236	245.6	3020	7	85	51	17	
SPC	236-4	236	245.6	3535	7	110.5	89	10.8	
SPC	236-4R	236	245.6	3525	7	110.5	65	22.8	
SPC	236-5	236	245.6	3535	7	136	89	23.5	
SPC	236-5R	236	245.6	3525	7	136	65	35.5	
SPC	236-6	236	245.6	3535	7	161.5	89	36.3	
SPC	236-6R	236	245.6	3525	7	161.5	65	48.3	
SPC	236-8	236	245.6	3535	7	212.5	89	61.8	
SPC	236-8R	236	245.6	3525	7	212.5	65	73.8	
SPC	236-10	236	245.6	4040	7	263.5	102	80.8	
SPC	240-3	240	249.6	3020	7	85	51	17	
SPC	240-4	240	249.6	3535	7	110.5	89	10.8	
SPC	243-3	243	252.6	3020	7	85	51	17	
SPC	243-4	243	252.6	3535	7	110.5	89	10.8	
SPC	250-1	250	259.6	3020	10	34	51		8.5
SPC	250-2G	250	259.6	3020	9	59.5	51	4.3	
SPC	250-3	250	259.6	3020	7	85	51	17	
SPC	250-4	250	259.6	3535	7	110.5	89	10.8	
SPC	250-4R	250	259.6	3525	7	110.5	65	22.8	
SPC	250-5	250	259.6	3535	7	136	89	23.5	
SPC	250-5R	250	259.6	3525	7	136	65	35.5	
SPC	250-6	250	259.6	3535	7	161.5	89	36.3	
SPC	250-6R	250	259.6	3525	7	161.5	65	48.3	
SPC	250-8	250	259.6	3535	7	212.5	89	61.8	
SPC	250-8R	250	259.6	3525	7	212.5	65	73.8	
SPC	250-10	250	259.6	4040	7	263.5	102	80.8	
SPC	265-2G	265	274.6	3020	9	59.5	51	4.3	
SPC	265-3	265	274.6	3535	4	85	89		
SPC	265-3R	265	274.6	3525	7	85	65	10	
SPC	265-4	265	274.6	3535	7	110.5	89	10.8	
SPC	265-4R	265	274.6	3525	7	110.5	65	22.8	
SPC	265-5	265	274.6	3535	7	136	89	23.5	
SPC	265-5R	265	274.6	3525	7	136	65	35.5	
SPC	265-6	265	274.6	3535	7	161.5	89	36.3	

SPC | Taper Bushed Pulley




SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPC	265-6R	265	274.6	3525	7	161.5	65	48.3	
SPC	265-8	265	274.6	3535	7	212.5	89	61.8	
SPC	265-8R	265	274.6	3525	7	212.5	65	73.8	
SPC	265-10	265	274.6	4040	7	263.5	102	80.8	
SPC	280-2G	280	289.6	3020	9	59.5	51	4.3	4
SPC	280-3	280	289.6	3535	8	85	89		
SPC	280-3R	280	289.6	3525	9	85	65	10	
SPC	280-4	280	289.6	3535	9	110.5	89	10.8	
SPC	280-4D	280	289.6	3535	7	110.5	89	10.8	
SPC	280-4R	280	289.6	3525	9	110.5	65	22.8	
SPC	280-5	280	289.6	3535	9	136	89	23.5	
SPC	280-5R	280	289.6	3525	9	136	65	35.5	
SPC	280-6	280	289.6	3535	9	161.5	89	36.3	
SPC	280-6D	280	289.6	3535	7	161.5	89	36.3	
SPC	280-6R	280	289.6	3525	9	161.5	65	48.3	
SPC	280-8	280	289.6	3535	7	212.5	89	61.8	
SPC	280-8R	280	289.6	3525	7	212.5	65	73.8	
SPC	280-10	280	289.6	4040	7	263.5	102	80.8	
SPC	300-1	300	309.6	3020	10	34	51		8.5
SPC	300-2G	300	309.6	3020	9	59.5	51	4.3	
SPC	300-3	300	309.6	3535	10	85	89		
SPC	300-3R	300	309.6	3525	9	85	65	10	
SPC	300-4	300	309.6	3535	9	110.5	89	10.8	
SPC	300-4R	300	309.6	3525	9	110.5	65	22.8	
SPC	300-5	300	309.6	3535	9	136	89	23.5	
SPC	300-5R	300	309.6	3525	9	136	65	35.5	
SPC	300-6	300	309.6	3535	9	161.5	89	36.3	
SPC	300-6R	300	309.6	3525	9	161.5	65	48.3	
SPC	300-8	300	309.6	4040	7	212.5	102	55.3	
SPC	300-8R	300	309.6	3525	9	212.5	65	73.8	
SPC	300-10	300	309.6	4545	7	263.5	114	74.8	
SPC	300-10R	300	309.6	4535	7	263.5	89	87.3	
SPC	308-3	308	317.6	3535	10	85	89		2
SPC	308-4	308	317.6	3535	9	110.5	89	10.8	
SPC	308-5	308	317.6	3535	9	136	89	23.5	
SPC	308-6	308	317.6	3535	9	161.5	89	36.3	

SPC | Taper Bushed Pulley

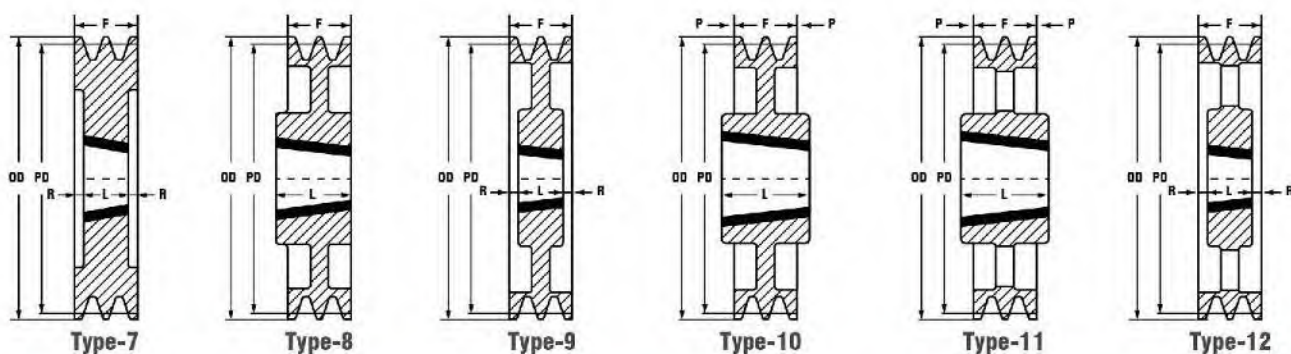






SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPC	315-2G	315	324.6	3020	9	59.5	51	4.3	2
SPC	315-3	315	324.6	3535	10	85	89		
SPC	315-3R	315	324.6	3525	9	85	65	10	
SPC	315-4	315	324.6	3535	9	110.5	89	10.8	
SPC	315-4R	315	324.6	3525	9	110.5	65	22.8	
SPC	315-5	315	324.6	3535	9	136	89	23.5	
SPC	315-5R	315	324.6	3525	9	136	65	35.5	
SPC	315-6	315	324.6	3535	9	161.5	89	36.3	
SPC	315-6R	315	324.6	3525	9	161.5	65	48.3	
SPC	315-8	315	324.6	4040	7	212.5	102	55.3	
SPC	315-8R	315	324.6	3525	9	212.5	65	73.8	2
SPC	315-10	315	324.6	4545	7	263.5	114	74.8	
SPC	335-2G	335	344.6	3020	12	59.5	51	4.3	
SPC	335-3	335	344.6	3535	11	85	89		
SPC	335-3R	335	344.6	3525	12	85	65	10	
SPC	335-4	335	344.6	3535	12	110.5	89	10.8	
SPC	335-4R	335	344.6	3525	12	110.5	65	22.8	
SPC	335-5	335	344.6	3535	9	136	89	23.5	
SPC	335-5R	335	344.6	3525	9	136	65	35.5	
SPC	335-6	335	344.6	3535	9	161.5	89	36.3	
SPC	335-6R	335	344.6	3525	9	161.5	65	48.3	
SPC	335-8	335	344.6	4040	9	212.5	102	55.3	2
SPC	335-8R	335	344.6	3525	9	212.5	65	73.8	
SPC	335-10	335	344.6	4545	7	263.5	114	74.8	
SPC	355-2G	355	364.6	3020	12	59.5	51	4.3	
SPC	355-3	355	364.6	3535	11	85	89		
SPC	355-3R	355	364.6	3525	12	85	65	10	
SPC	355-4	355	364.6	3535	12	110.5	89	10.8	
SPC	355-4R	355	364.6	3525	12	110.5	65	22.8	
SPC	355-5	355	364.6	3535	12	136	89	23.5	
SPC	355-5R	355	364.6	3525	12	136	65	35.5	
SPC	355-6	355	364.6	3535	9	161.5	89	36.3	2
SPC	355-6R	355	364.6	3525	9	161.5	65	48.3	
SPC	355-8	355	364.6	4040	9	212.5	102	55.3	
SPC	355-8R	355	364.6	3525	9	212.5	65	73.8	
SPC	355-10	355	364.6	4040	7	263.5	102	80.8	
SPC	355-10Y	355	364.6	4545	7	263.5	114	74.8	
SPC	375-2G	375	384.6	3020	12	59.5	51	4.3	2
SPC	375-3	375	384.6	3535	11	85	89		
SPC	375-3R	375	384.6	3525	12	85	65	10	

SPC | Taper Bushed Pulley

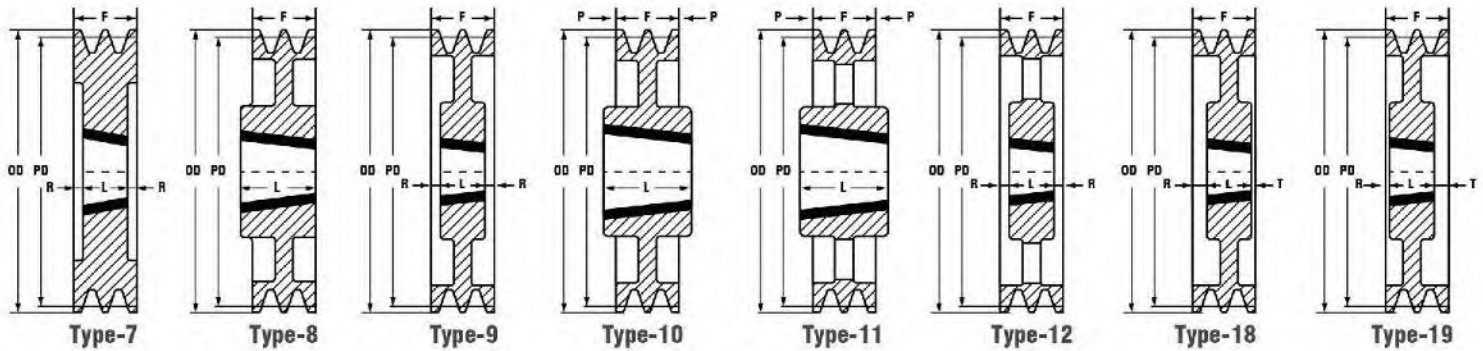






SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPC	375-4	375	384.6	3535	12	110.5	89	10.8	
SPC	375-4R	375	384.6	3525	12	110.5	65	22.8	
SPC	375-5	375	384.6	3535	12	136	89	23.5	
SPC	375-5R	375	384.6	3525	12	136	65	35.5	
SPC	375-6	375	384.6	4040	9	161.5	102	29.8	
SPC	375-6R	375	384.6	3525	9	161.5	65	48.3	
SPC	375-6Y	375	384.6	3535	9	161.5	89	36.3	
SPC	375-8	375	384.6	4545	9	212.5	114	49.3	
SPC	375-8R	375	384.6	4030	9	212.5	76	68.3	
SPC	375-10	375	384.6	4545	9	263.5	114	74.8	
SPC	375-10R	375	384.6	4535	9	263.5	89	87.3	
SPC	375-12	375	384.6	5050	7	314.5	127	93.8	
SPC	400-2G	400	409.6	3525	11	59.5	64		2.3
SPC	400-3	400	409.6	3535	11	85	89		2
SPC	400-3R	400	409.6	3525	12	85	65	10	
SPC	400-4	400	409.6	3535	12	110.5	89	10.8	
SPC	400-4R	400	409.6	3525	12	110.5	65	22.8	
SPC	400-5	400	409.6	3535	12	136	89	23.5	
SPC	400-5R	400	409.6	3525	12	136	65	35.5	
SPC	400-6	400	409.6	4040	9	161.5	102	29.8	
SPC	400-6R	400	409.6	3525	9	161.5	65	48.3	
SPC	400-8	400	409.6	4545	9	212.5	114	49.3	
SPC	400-8R	400	409.6	4030	9	212.5	76	68.3	
SPC	400-10	400	409.6	5050	9	263.5	127	68.3	
SPC	400-10R	400	409.6	5040	9	263.5	102	80.8	
SPC	400-12	400	409.6	5050	9	314.5	127	93.8	
SPC	425-3	425	434.6	3535	11	85	89		2
SPC	425-3R	425	434.6	3525	12	85	65	10	
SPC	425-4	425	434.6	3535	12	110.5	89	10.8	
SPC	425-4R	425	434.6	3525	18	110.5	65	10	
SPC	425-5	425	434.6	3535	12	136	89	23.5	
SPC	425-5R	425	434.6	3525	18	136	65	10	
SPC	425-5Z	425	434.6	4040	9	136	102	17	
SPC	425-6	425	434.6	4040	9	161.5	102	29.8	
SPC	425-6R	425	434.6	4535	18	161.5	89	43	
SPC	425-6Z	425	434.6	4545	9	161.5	114	23.8	
SPC	425-8	425	434.6	4545	9	212.5	114	49.3	
SPC	425-8R	425	434.6	4535	19	212.5	89	43	
SPC	425-10	425	434.6	5050	9	263.5	127	68.3	

SPC | Taper Bushed Pulley

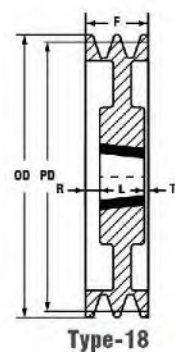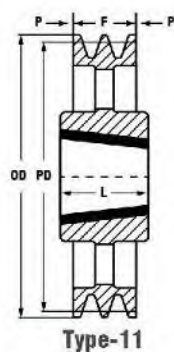




SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPC	425-10R	425	434.6	5040	9	263.5	102	80.8	
SPC	450-2	450	459.6	3535	11	59.5	89		14.8 2
SPC	450-3	450	459.6	3535	11	85	89		
SPC	450-3R	450	459.6	3525	12	85	65	10	
SPC	450-4	450	459.6	3535	12	110.5	89	10.8	
SPC	450-4R	450	459.6	3525	18	110.5	65	1	
SPC	450-5	450	459.6	4040	12	136	102	17	
SPC	450-5R	450	459.6	3525	18	136	65	10	
SPC	450-6	450	459.6	4545	9	161.5	114	23.8	
SPC	450-6R	450	459.6	4535	18	161.5	89	43	
SPC	450-8	450	459.6	5050	9	212.5	127	42.8	
SPC	450-8R	450	459.6	4535	19	212.5	89	43	
SPC	450-10	450	459.6	5050	9	263.5	127	68.3	
SPC	450-10R	450	459.6	5040	9	263.5	102	80.8	
SPC	450-12	450	459.6	5050	9	314.5	127	93.8	
SPC	475-3	475	484.6	3535	11	85	89		2
SPC	475-3R	475	484.6	3525	12	85	65	10	
SPC	475-4	475	484.6	3535	12	110.5	89	10.8	
SPC	475-4R	475	484.6	3525	18	110.5	65	10	
SPC	475-5	475	484.6	4040	12	136	102	17	
SPC	475-5R	475	484.6	3525	18	136	65	10	
SPC	475-6	475	484.6	4545	9	161.5	114	23.8	
SPC	475-6R	475	484.6	4535	18	161.5	89	43	
SPC	475-8	475	484.6	5050	9	212.5	127	42.8	
SPC	475-8R	475	484.6	4535	18	212.5	89	43	
SPC	475-10	475	484.6	5050	9	263.5	127	68.3	
SPC	500-3	500	509.6	3535	11	85	89		2
SPC	500-3R	500	509.6	3525	12	85	65	10	
SPC	500-4	500	509.6	3535	12	110.5	89	10.8	
SPC	500-4R	500	509.6	3525	18	110.5	65	10	
SPC	500-5	500	509.6	4040	12	136	102	17	
SPC	500-5R	500	509.6	3525	18	136	65	10	
SPC	500-6	500	509.6	4545	12	161.5	114	23.8	
SPC	500-6R	500	509.6	4535	18	161.5	89	43	
SPC	500-8	500	509.6	5050	9	212.5	127	42.8	
SPC	500-8R	500	509.6	4535	18	212.5	89	43	
SPC	500-10	500	509.6	5050	9	263.5	127	68.3	

SPC | Taper Bushed Pulley





SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPC	500-12	500	509.6	5050	9	314.5	127	93.8	
SPC	530-3	530	539.6	3535	11	85	89		2
SPC	530-3R	530	539.6	3525	12	85	65	10	
SPC	530-4	530	539.6	4040	12	110.5	102	4.3	
SPC	530-4R	530	539.6	3525	18	110.5	65	10	
SPC	530-4Y	530	539.6	3535	18	110.5	89	0	
SPC	530-5	530	539.6	4545	12	136	114	11	
SPC	530-5R	530	539.6	4535	18	136	89	43	
SPC	530-5Y	530	539.6	4040	12	136	102	17	
SPC	530-6	530	539.6	5050	12	161.5	127	17.3	
SPC	530-6R	530	539.6	4535	18	161.5	89	43	
SPC	530-8	530	539.6	5050	9	212.5	127	42.8	
SPC	530-8R	530	539.6	4535	18	212.5	89	43	
SPC	530-10	530	539.6	5050	9	263.5	127	68.3	
SPC	560-2	560	569.6	3535	11	59.5	89		14.8
SPC	560-3	560	569.6	3535	11	85	89		2
SPC	560-3R	560	569.6	3525	12	85	65	10	
SPC	560-4	560	569.6	4040	12	110.5	102	4.3	
SPC	560-4R	560	569.6	3525	18	110.5	65	10	
SPC	560-5	560	569.6	4545	12	136	114	11	
SPC	560-5R	560	569.6	4535	18	136	89	43	
SPC	560-6	560	569.6	5050	12	161.5	127	17.3	
SPC	560-6R	560	569.6	4535	18	161.5	89	43	
SPC	560-8	560	569.6	5050	12	212.5	127	42.8	
SPC	560-8R	560	569.6	4535	18	212.5	89	43	
SPC	560-10	560	569.6	5050	12	263.5	127	68.3	
SPC	560-10R	560	569.6	5040	12	263.5	102	80.8	
SPC	560-12	560	569.6	5050	12	314.5	127	93.8	
SPC	630-3	630	639.6	4040	11	85	102		8.5
SPC	630-3R	630	639.6	4030	12	85	76	4.5	
SPC	630-4	630	639.6	4545	11	110.5	114		1.8
SPC	630-4R	630	639.6	4030	18	110.5	76	4.5	
SPC	630-5	630	639.6	4545	12	136	127	4.5	
SPC	630-5R	630	639.6	4535	18	136	89	36.5	
SPC	630-5Y	630	639.6	4535	16	136	114	22	
SPC	630-6	630	639.6	5050	12	161.5	127	17.3	

SPC | Taper Bushed Pulley



SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPC	630-6R	630	639.6	4535	12	161.5	89	36.3	
SPC	630-8	630	639.6	5050	12	212.5	127	42.8	
SPC	630-8R	630	639.6	4535	18	212.5	89	36.5	
SPC	630-10	630	639.6	5050	12	263.5	127	68.3	
SPC	630-12	630	639.6	5050	12	314.5	127	93.8	
SPC	710-3	710	719.6	4040	11	85	102		8.5
SPC	710-3R	710	719.6	4030	12	85	76	4.5	
SPC	710-4	710	719.6	4040	12	110.5	102	4.3	
SPC	710-4R	710	719.6	4030	12	110.5	76	17.3	
SPC	710-4Y	710	719.6	4545	11	110.5	114		1.8
SPC	710-5	710	719.6	5050	12	136	127	4.5	
SPC	710-5R	710	719.6	5040	12	136	102	17	
SPC	710-6	710	719.6	5050	12	161.5	127	17.3	
SPC	710-6R	710	719.6	5040	12	161.5	102	29.8	
SPC	710-8	710	719.6	5050	12	212.5	127	42.8	
SPC	710-8R	710	719.6	5040	12	212.5	102	55.3	
SPC	710-10	710	719.6	5050	12	263.5	127	68.3	
SPC	710-12	710	719.6	5050	12	314.5	127	93.8	
SPC	800-3	800	809.6	4545	11	85	114		14.5
SPC	800-3R	800	809.6	4535	11	85	89		2
SPC	800-4	800	809.6	5050	11	110.5	127		8.3
SPC	800-4R	800	809.6	5040	12	110.5	102	4.3	
SPC	800-5	800	809.6	5050	12	136	127	4.5	
SPC	800-5R	800	809.6	5040	12	136	102	17	
SPC	800-6	800	809.6	5050	12	161.5	127	17.3	
SPC	800-6R	800	809.6	5040	12	161.5	102	29.8	
SPC	800-8	800	809.6	5050	12	212.5	127	42.8	
SPC	800-8R	800	809.6	5040	12	212.5	102	55.3	
SPC	800-10	800	809.6	5050	12	263.5	127	68.3	
SPC	800-10R	800	809.6	5040	12	263.5	102	80.8	
SPC	800-12	800	809.6	5050	12	314.5	127	93.8	
SPC	1000-3	1000	1009.6	5050	11	85	127		21
SPC	1000-3R	1000	1009.6	5040	11	85	102		8.3
SPC	1000-4	1000	1009.6	5050	11	110.5	127		8.5
SPC	1000-4R	1000	1009.6	5040	12	110.5	102	4.3	
SPC	1000-5	1000	1009.6	5050	12	136	127	4.5	

SPC | Taper Bushed Pulley

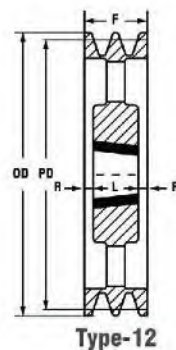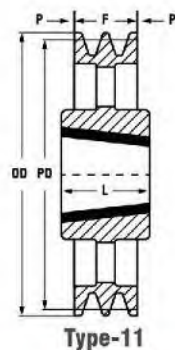

SIZE		PD	OD	BUSH	TYPE	DIMENSIONS (mm)			
		(mm)	(mm)	No.		F	L	R	P
SPC	1000-5 R	1000	1009.6	5040	12	136	102	17	
SPC	1000-6	1000	1009.6	5050	12	161.5	127	17.3	
SPC	1000-6 R	1000	1009.6	5040	12	161.5	102	29.8	
SPC	1000-8	1000	1009.6	5050	12	212.5	127	42.8	
SPC	1000-8 R	1000	1009.6	5040	12	212.5	102	55.3	
SPC	1000-10	1000	1009.6	5050	12	263.5	127	68.3	
SPC	1000-12	1000	1009.6	6050	12	314.5	127	93.8	
SPC	1250-3	1250	1259.6	5050	11	85	127		21
SPC	1250-4	1250	1259.6	5050	11	110.5	127		8.3
SPC	1250-5	1250	1259.6	5050	12	136	127	4.5	
SPC	1250-5 R	1250	1259.6	5040	12	136	102	17	
SPC	1250-6	1250	1259.6	5050	12	161.5	127	17.3	
SPC	1250-6 R	1250	1259.6	5040	12	161.5	102	29.8	
SPC	1250-8	1250	1259.6	5050	12	212.5	127	42.8	
SPC	1250-8 R	1250	1259.6	5040	12	212.5	102	55.3	
SPC	1250-10	1250	1259.6	5050	12	263.5	127	68.3	

NOTE:

- 1.The Size Attached "R" Means The Pulley With Short Bush.
- 2.The Size Attached "Z" Means The Pulley With Different Structure Or Special Bush No. So As To Meet Client' s Demand.

Taper Bushings Dimensions

INSTALLATION INSTRUCTION FOR PULLEYS SCREW TIGHTENING TORQUES

TO ASSEMBLE

- 1.Clean and degrease the bore and taper surfaces of the bush and the tapered bore of the pulley ,insert the bush into the pulley hub and line up holes(half thread holes must line up with half straight holes).
- 2.Lightly oil the grub (bush size 1008 to 3030)or the cap screws(bush size 3535 to5050) and screw them in do not tighten yet.
- 3.Clean and degrease the shaft .Fit pulley with taper bush on shaft and locate in desired position.
- 4.When using a key itshould first be fitted in the shaft keyway.There should be a top clearance between the keyway in the bore.
- 5.Using a hexagon socket wrench(DIN911) gradually and tighten the grub cap screws in a accordance with the torques as listed in the schedule of screw tightening for torques.
- 6.When the drive has ben operating under load for period(half to onehour)chek and ensure that the screws remain at the appropriate tightening torque.
- 7.In order to eliminate the ingress of dirt fill all empty holes with vaseline.

REMOVAL

- 1.Loose and remove all the screws and placet hem in holes in bushing.
- 2.Tightent he screws alternatively till the hub' s grip on bushing is loosen.The inner bore of bushing can be slid on the shaft.
- 3.Remove the bushing from the shaft.


BUSH NO.	SCREW TIGHTNING TORQUES(Nm)	SCREW	
		QUANTITY	SIZE
1008 1108	5.6	2	1/4" BSW
1210 1215	20	2	3/8" BSW
1310 1315	20	2	3/8" BSW
1610 1615	20	2	3/8" BSW
2012 2017	31	2	7/16" BSW
2517 2525	48	2	1/2" BSW
3020 3030	90	2	5/8" BSW
3525 3535	112	3	1/2" BSW
4030 4040	170	3	5/8" BSW
4535 4545	192	3	3/4" BSW
5040 5050	271	3	7/8" BSW



Taper Bushings Dimensions

(in.)


DIMENSION OF TAPER-LOCK BUSHING 1008—3030

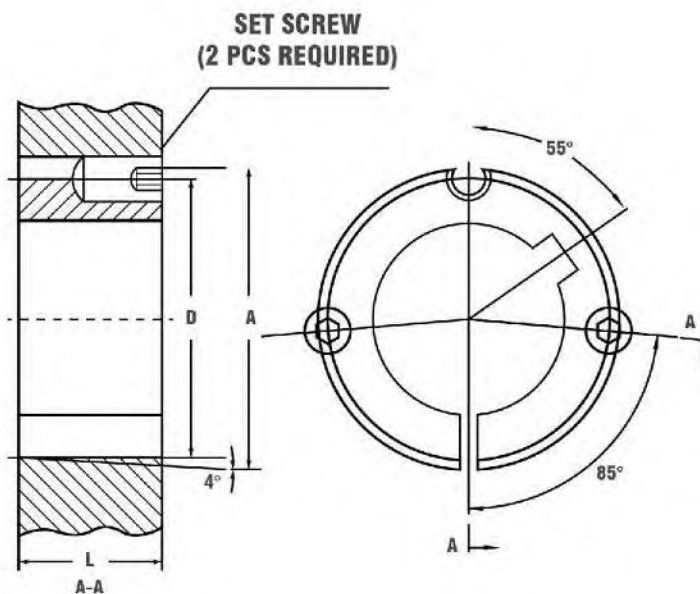

BUSH NO.	L	A	D	Set Screws Dia × Length (BSW)
1008	7/8	1.386	1-21/64	1/4×1/2
1108	7/8	1.511	1-29/64	1/4×1/2
1210	1	1 7/8	1-3/4	3/8×5/8
1215	1 1/2			
1310	1	2	1-7/8	3/8×5/8
1610	1	2 1/4	2-1/8	3/8×5/8
1615	1 1/2			
2012	1 1/4	2 3/4	2-5/8	7/16×7/8
2017	1 3/4			
2517	1 3/4	3 3/8	3-1/4	1/2×1
2525	1 3/4			
3020	2	4 1/4	4	5/8×1-1/4
3030	3			

3525—5050

(in.)

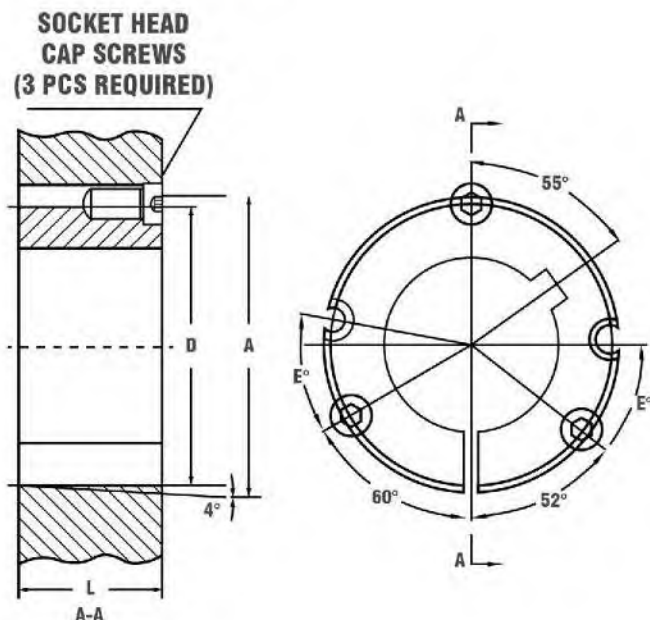

BUSH NO.	L	A	D	Set Screws Dia × Length (BSW)	E°
3525	2 1/2	5	4.83	1/2×1 1/2	40°
3535	3 1/2				
4030	3	5 3/4	5.54	5/8×1 3/4	40°
4040	4				
4534	3 1/2	6 3/8	6.13	3/4×2	40°
4545	4 1/4				
5040	4	7	6.72	7/8×2 1/4	37°
5050	5				


Taper Bushings Dimensions

BORE SIZES FOR TAPER BUSHINGS AND THE RELEVANT KEYWAY DIMENSIONS

SPEC	BORE SIZE	REMARK
1008	1/2~7/8	STANDARD KEYWAY
	15/16, 1	SHALLOW KEYWAY
1108	1/2~1	STANDARD KEYWAY
	1 1/16, 1 1/8	SHALLOW KEYWAY
1210	1/2~1 1/4	STANDARD KEYWAY
1215		
1310	1/2 ~ 1 3/8	STANDARD KEYWAY
1610	1/2~1 1/2	
1615	1 9/16, 1 5/8	SHALLOW KEYWAY
2012	1/2~2	STANDARD KEYWAY
2017		
2517	1/2~2 1/2	STANDARD KEYWAY
2525		
3020	13/16~3	STANDARD KEYWAY
3030		
3525	1 3/16~3 1/4	STANDARD KEYWAY
3535	3 5/16, 3 3/8, 3 7/16, 3 1/2	SHALLOW KEYWAY
4030	1 7/16~3 3/4	STANDARD KEYWAY
4040	3 7/8, 3 15/16, 4	SHALLOW KEYWAY
4535	1 15/16~4 1/4	STANDARD KEYWAY
4545	4 3/8, 4 7/16, 4 1/2	SHALLOW KEYWAY
5040	2 7/16~5	STANDARD KEYWAY
5050		

BORE SIZE d	SHALLOW KEYWAY DIMENSION			
	WIDTH w	TOLERANCE	DEPTH h	TOLERANCE
1/4 < d ≤ 1/2	0.125	+0.002 0	0.06	+0.01 0
1/2 < d ≤ 3/4	0.1875		0.088	
3/4 < d ≤ 1	0.25		0.115	
1 < d ≤ 1 1/4	0.3126		0.112	
1 1/4 < d ≤ 1 1/2	0.375		0.108	
1 1/2 < d ≤ 1 3/4	0.4375		0.135	
1 3/4 < d ≤ 2	0.5	+0.003 0	0.131	
2 < d ≤ 2 1/2	0.625		0.185	
2 1/2 < d ≤ 3	0.75		0.209	
3 < d ≤ 3 1/2	0.875		0.264	
3 1/2 < d ≤ 4	1.0		0.318	
4 < d ≤ 5	1.25		0.366	

SPEC	BORE SIZE	SHALLOW KEYWAY DIMENSION			
		WIDTH	TOLERANCE	DEPTH	TOLERANCE
1008	15/16, 1	0.25	+ 0.002 0	0.05	+ 0.01 0
1108	1 1/16, 1 1/8	0.3126		0.05	
1610 1615	1 9/16, 1 5/8	0.4375		0.103	
3525 3535	3 5/16, 3 3/8 3 7/16, 3 1/2	0.875	+0.003 0	0.20	
4030 4040	3 7/8, 3 15/16, 4	1.0		0.192	
4535 4545	4 3/8, 4 7/16, 4 1/2	1.25		0.18	

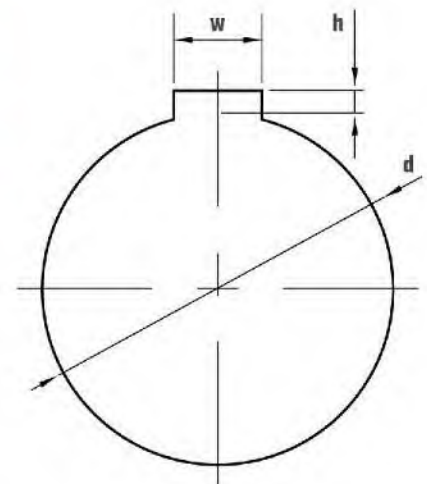

Taper Bushings Dimensions

BORE SIZES FOR TAPER BUSHINGS AND THE RELEVANT KEYWAY DIMENSIONS

BUSH NO.	BORE	KEYWAY
1008	10	3×1.4
	11,12	4×1.8
	14,15,16	5×2.3
	18,19,20,22	6×2.8
	24,25	8×2.3
1108	9,10	3×1.4
	11,12	4×1.8
	14,15,16,17	5×2.3
	18,19,20,22	6×2.8
	24,25	8×3.3
1210	28	8×2.3
1210	10	3×1.4
1210 1215	11,12	4×1.8
	14,15,16	5×2.3
	18,19,20,22	6×2.8
	24,25,26,28,30	8×3.3
	32	10×3.3
1310	11,12	4×1.8
	14,16	5×2.3
	18,19,20,22	6×2.8
	24,25,28,30	8×3.3
	32,35	10×3.3
1610	10	3×1.4
	11,12	4×1.8
	42	12×3.3
1615	42	12×2.8
1610 1615	14,15,16,17	5×2.3
	18,19,20,22	6×2.8
	23,24,25,28,30	8×3.3
	32,34,35,38	10×3.3
	40	12×3.3
2012	10	3×1.4
	12	4×1.8
	14,15,16,17	5×2.3
2012 2017	18,19,20,22	6×2.8
	23,24,25,28,30	8×3.3
	32,34,35,38	10×3.3
	39,40,42,44	12×3.3
	45,48,50	14×3.8
2517	16	5×2.3
	18,19,20,22	6×2.8
	32,33,35,36,38	10×3.3
	40,42,44	12×3.3
	45,47,48,50	14×3.8
	52,54,55	16×4.3
	60,65	18×4.4

BUSH NO.	BORE	KEYWAY
3020 3030	24,25,28,30	8×3.3
	32,33,35,36,38	10×3.3
	40,42	12×3.3
	45,48,50	14×3.8
	52,54,55	16×4.3
	60,65	18×4.4
3525 3535	70,75	20×4.9
	30	8×3.3
	32,33,35,38	10×3.3
	40,42	12×3.3
	45,48,50	14×3.8
	55	16×4.3
4030 4040	59,60,62,65	18×4.4
	70,75	20×4.9
	80,85	22×5.4
	90	25×5.4
	95	25×3.8
	40,42	12×3.3
4535 4545	45,48,50	14×3.8
	55	16×4.3
	60,65	18×4.4
	70,75	20×4.9
	80,85	22×5.4
	88,90,95	25×5.4
5040 5050	100,105,110	28×6.4
	42	12×3.3
	48,50	14×3.8
	55	16×4.3
	60,65	18×4.4
	70,75	20×4.9
5040 5050	80,85	22×5.4
	88,90,95	25×5.4
	100,105,110	28×6.4
	115	32×7.4
	48	14×3.8
	55	16×4.3
5040 5050	60,65	18×4.4
	70,75	20×4.9
	80,85	22×5.4
	90,95	25×5.4
	98,100,105,110	28×6.4
	115,120,125	32×7.4

Taper Bushings Dimensions

**RATING LOAD CAPACITY
TORQUE CAPACITY PARAMETERS FOR GENERAL
TYPE IN THE FOLLOWING TABLE:**

BUSH NO.	TORQUE CAPACITY		BUSH NO.	TORQUE CAPACITY	
	1BF.IN	N.M		1BF.IN	N.M
1008	1,200	136	3535	44,800	5,060
1108	1,300	147	4040	77,300	8,740
1210 1215	3,600	407	4545	110,000	12,400
1310 1315	3,850	435	5050	126,000	14,200
1610 1615	4,300	486	6050	282,000	31,900
			7060	416,000	47,000
2012	7,150	808	8065	456,000	51,500
2517 2525	11,600	1,310	10085	869,000	98,200
3020 3030	24,000	2,710	120100	1,520,000	172,000

1BF.IN=0.113N.M